

Özuyan Hidrolik Vinç Sanayi

2025-2026



Katalogu



PUMA
CRANE


Yeni yılda tüm müşterilerimize başarı, huzur ve mutluluk dileriz.

PMA 70-B3 TELESKOBİK

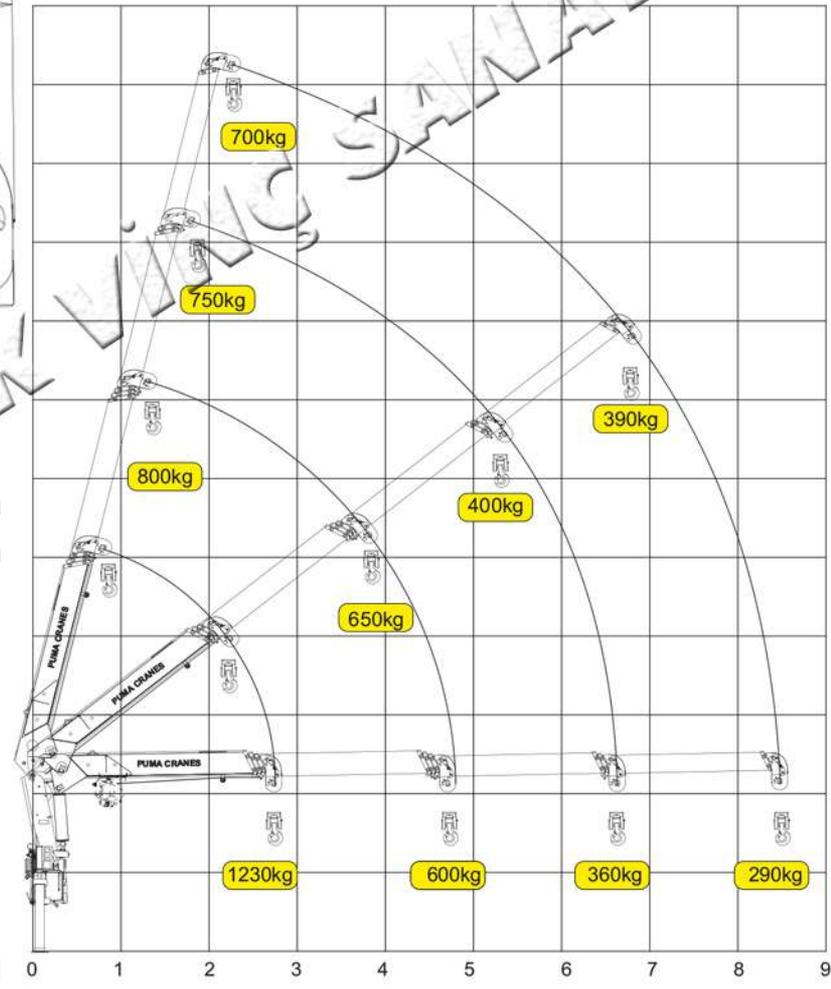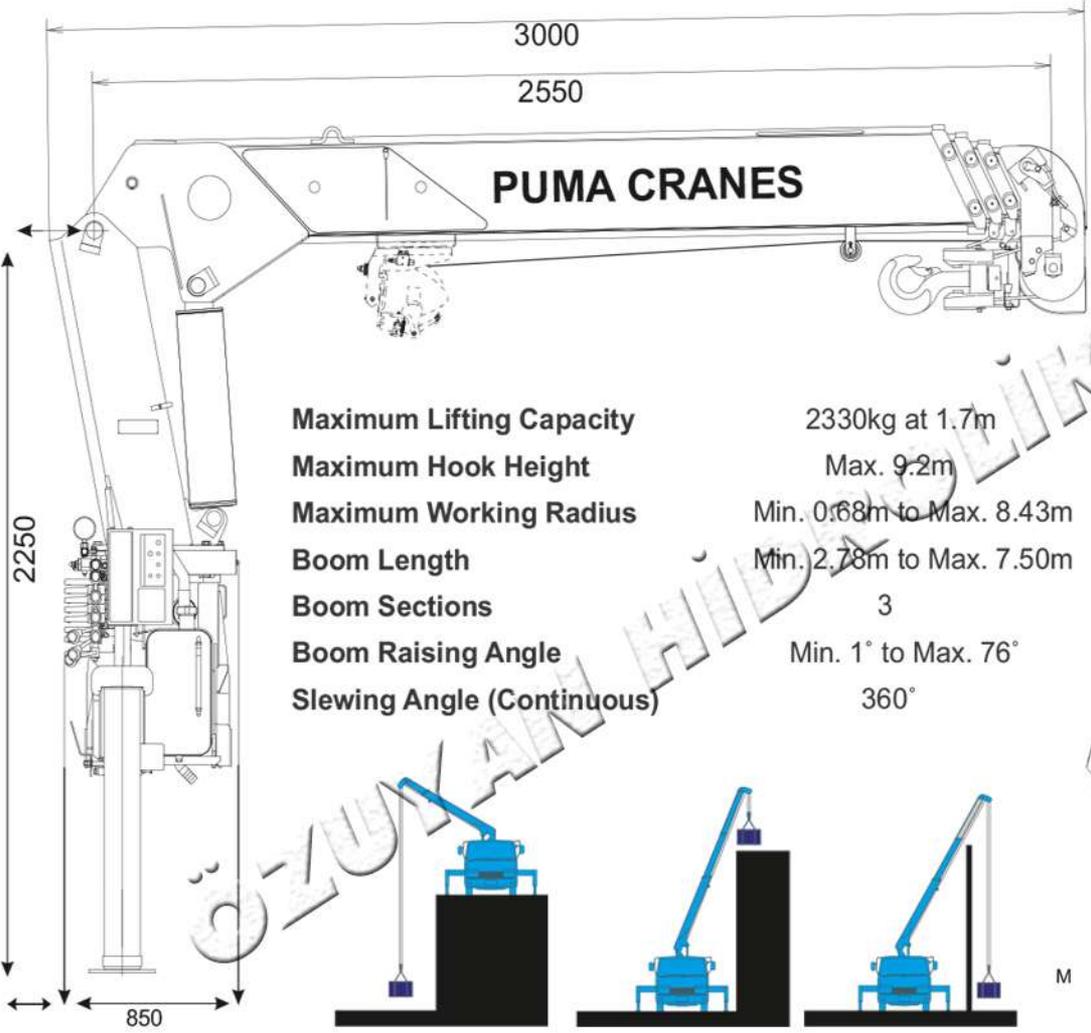



PMA 70-B3 TELESKOBİK

PUMA CRANES

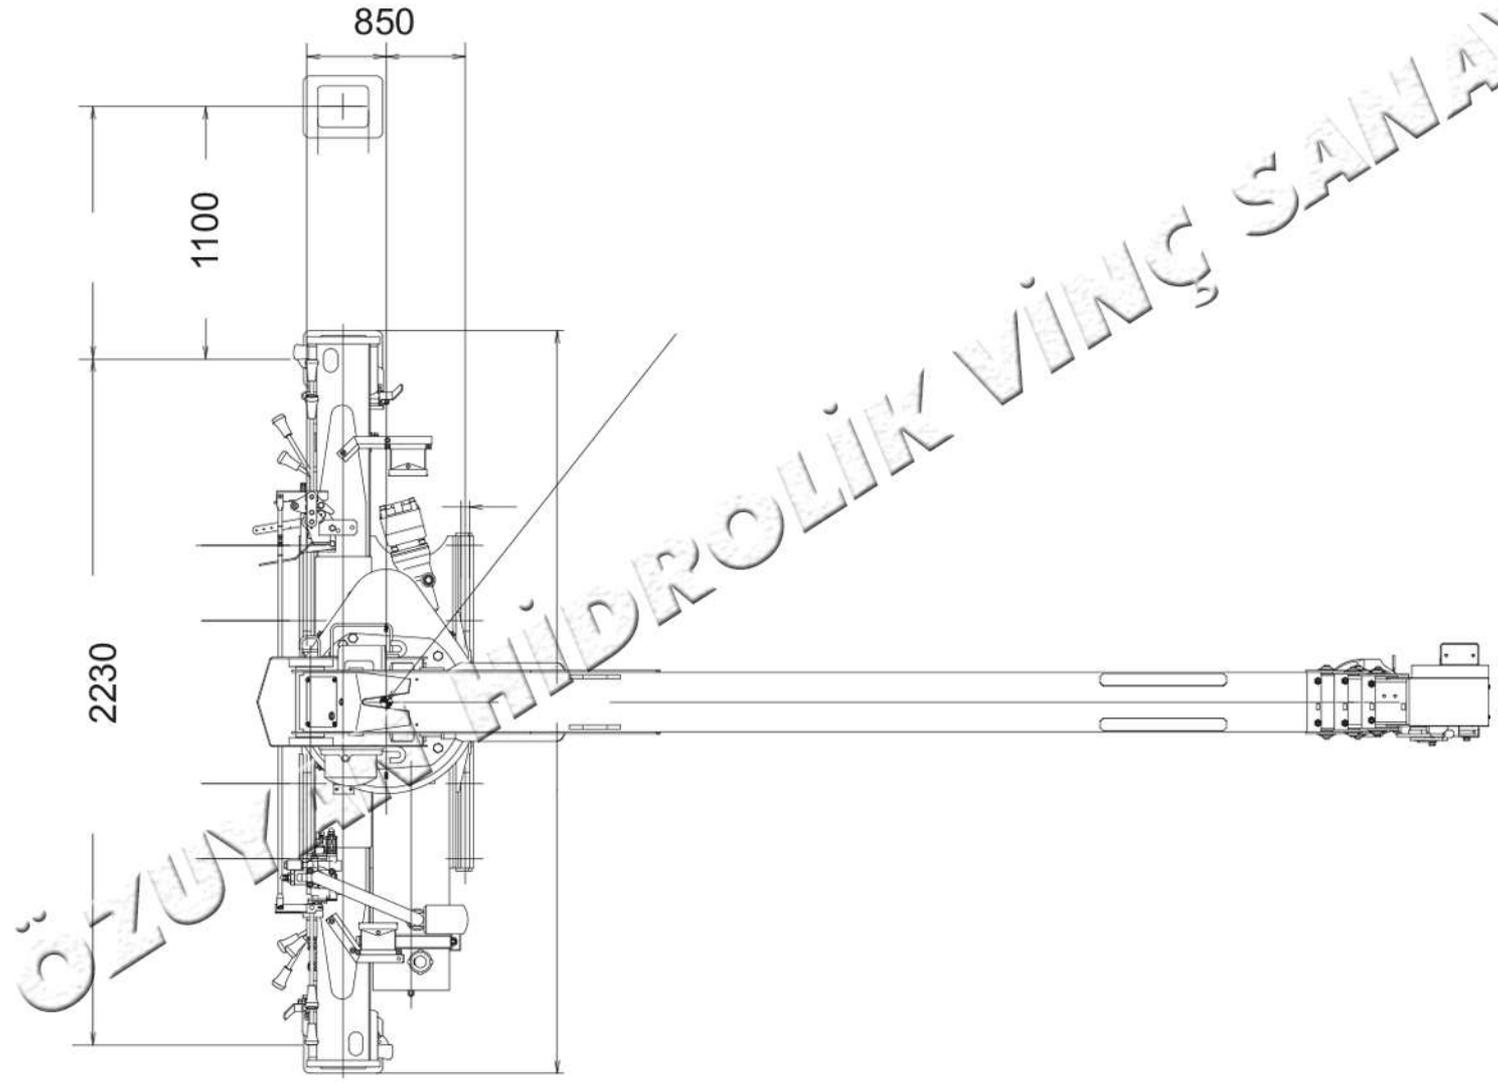


PMA 80-B3 TELESKOPİK

PUMA CRANES

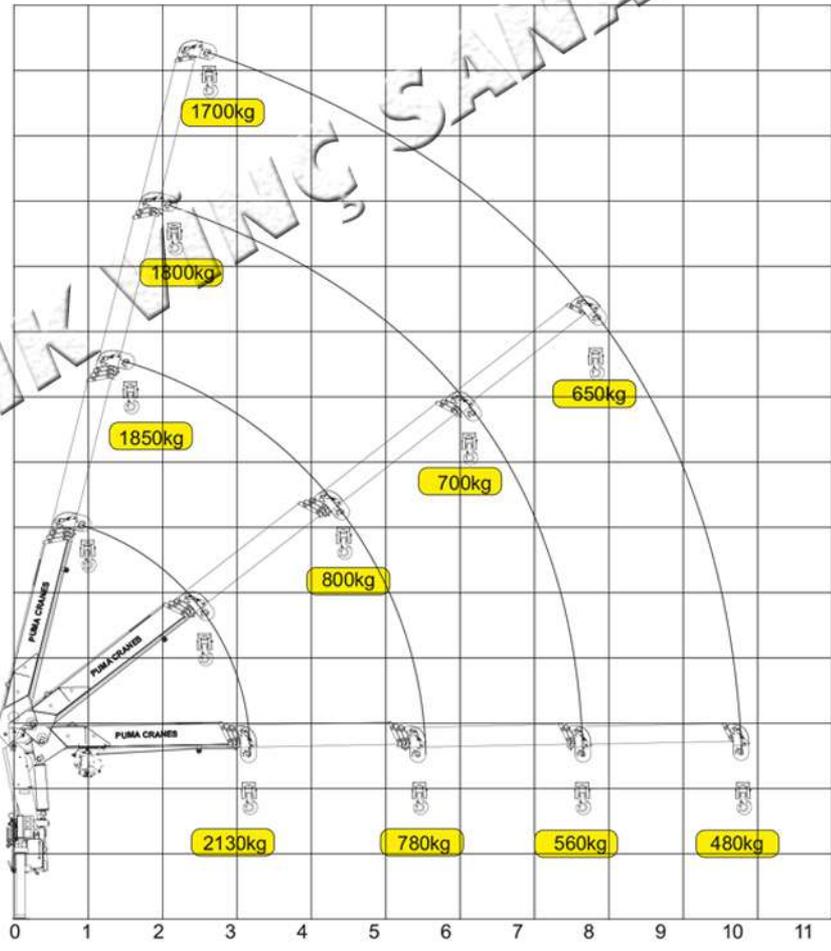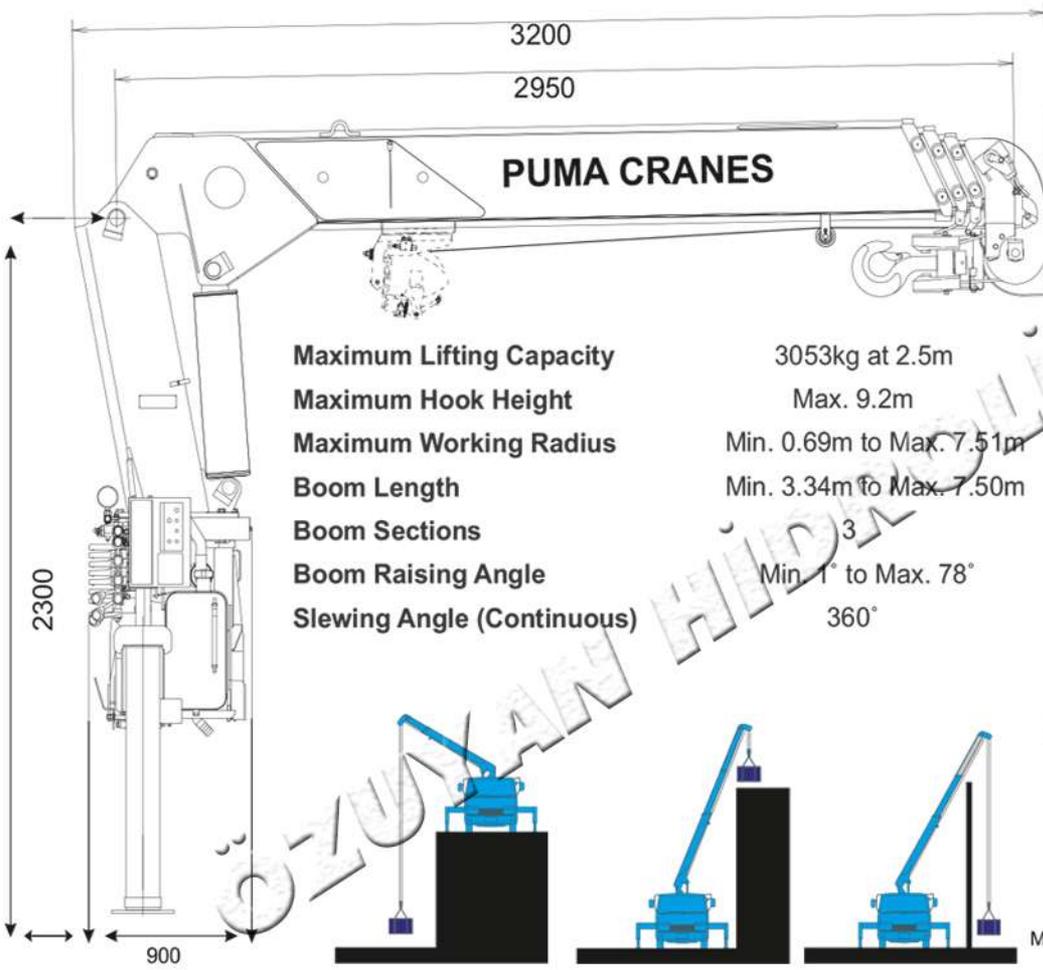


PMA 80-B3 TELESKOPİK

PUMA CRANES

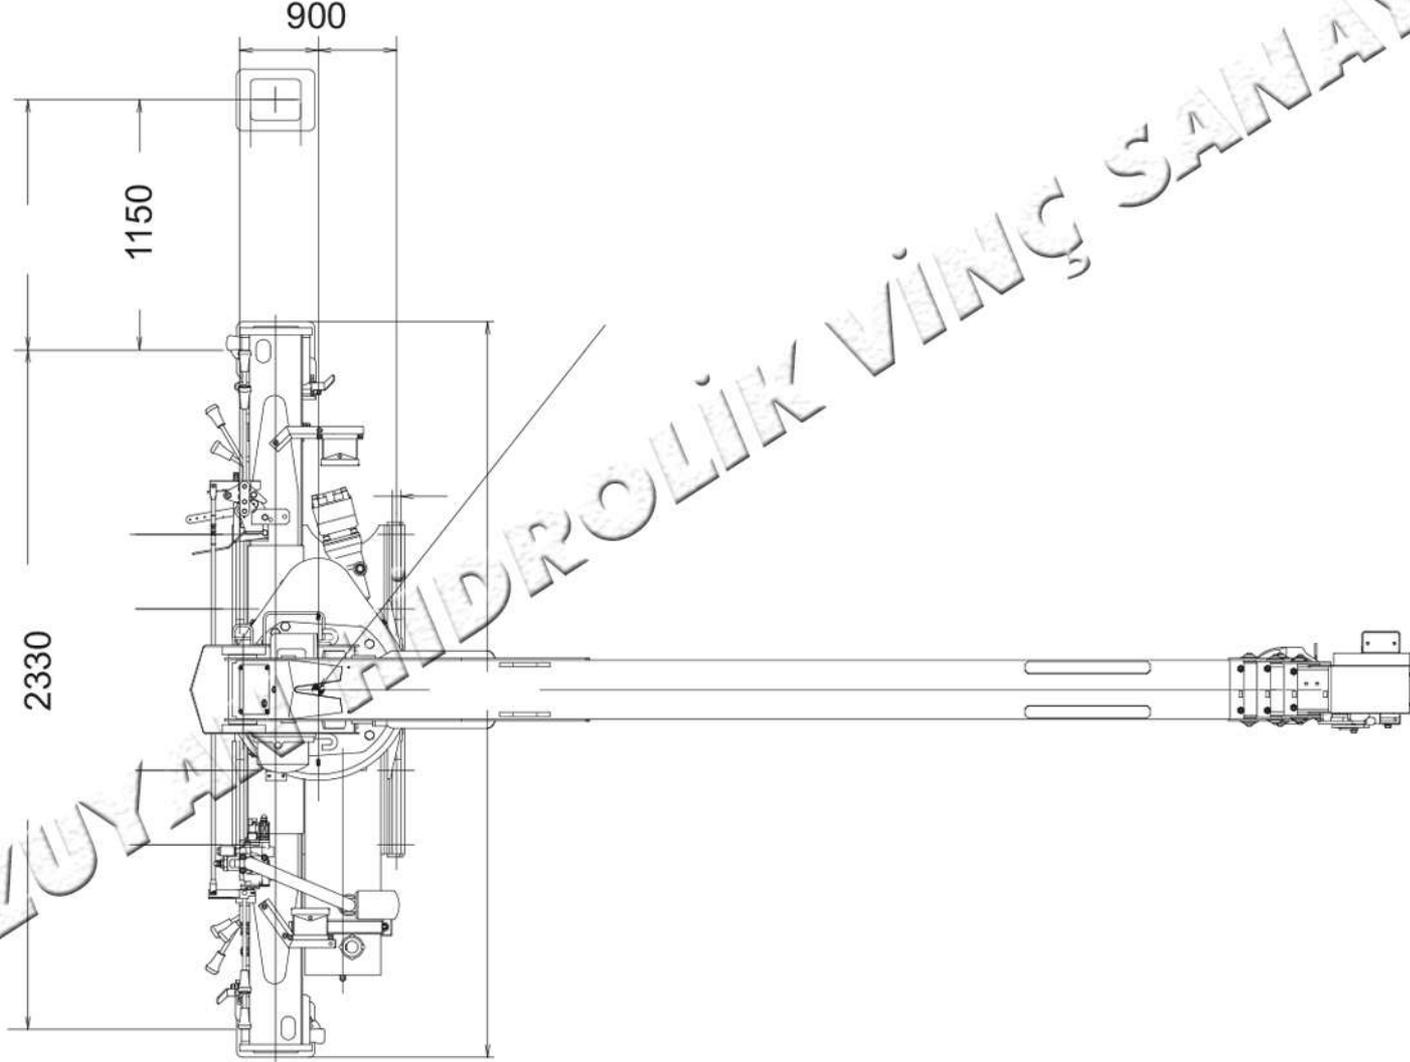


PMA 150-B3 TELESKOBİK

PUMA CRANES


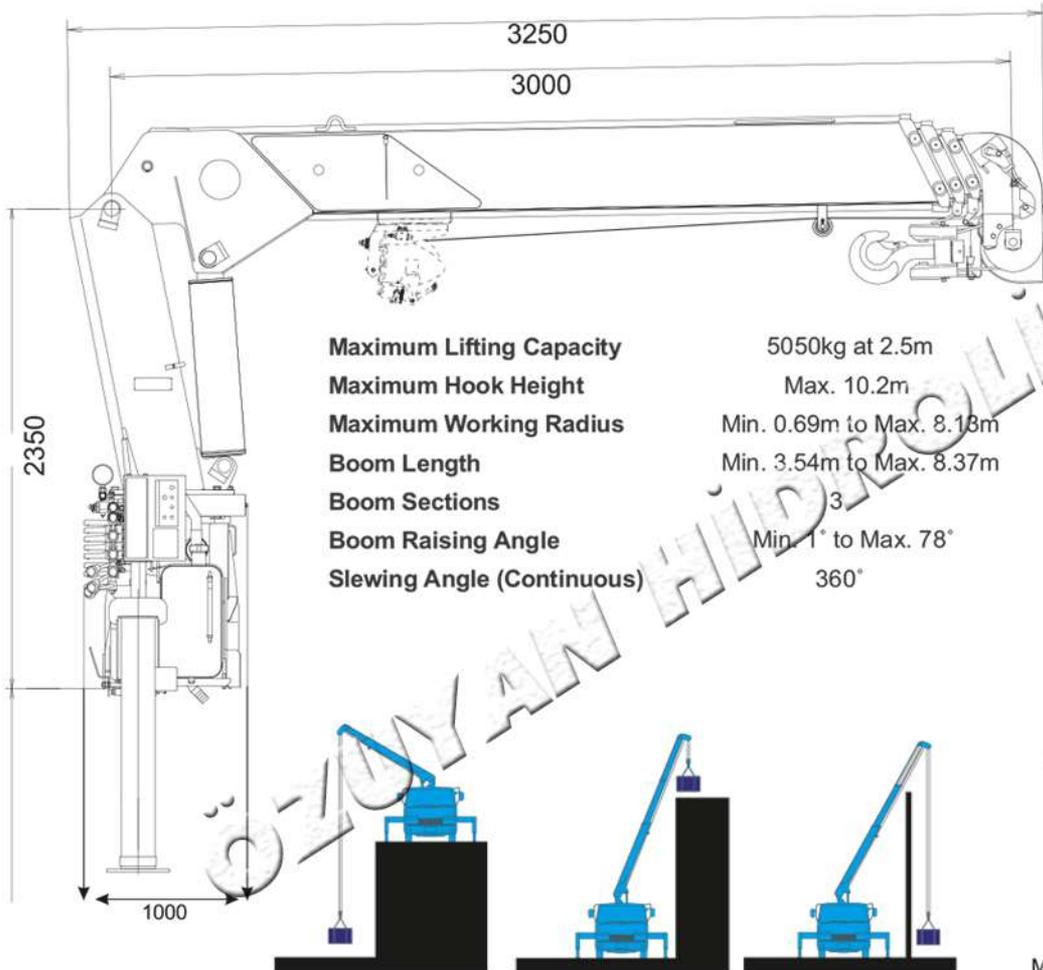


Maximum Lifting Capacity	5050kg at 2.5m
Maximum Hook Height	Max. 10.2m
Maximum Working Radius	Min. 0.69m to Max. 8.18m
Boom Length	Min. 3.54m to Max. 8.37m
Boom Sections	3
Boom Raising Angle	Min. 1° to Max. 78°
Slewing Angle (Continuous)	360°

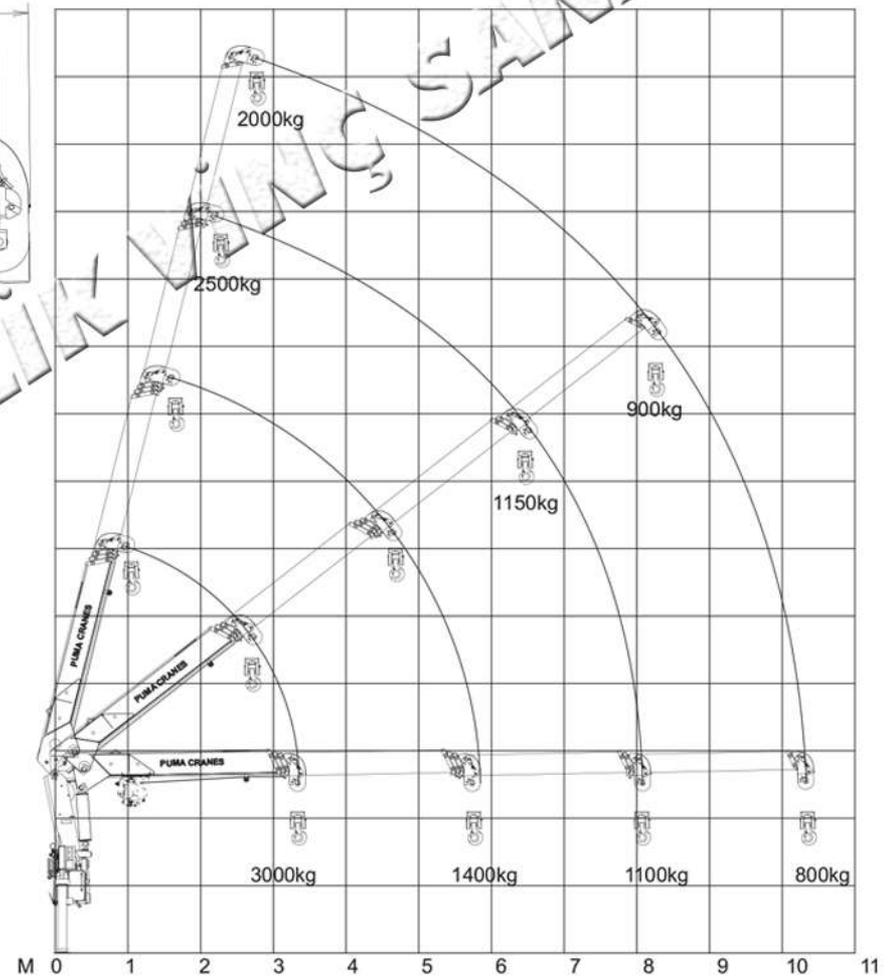


PMA 200-B3 TELESKOBİK

PUMA CRANES

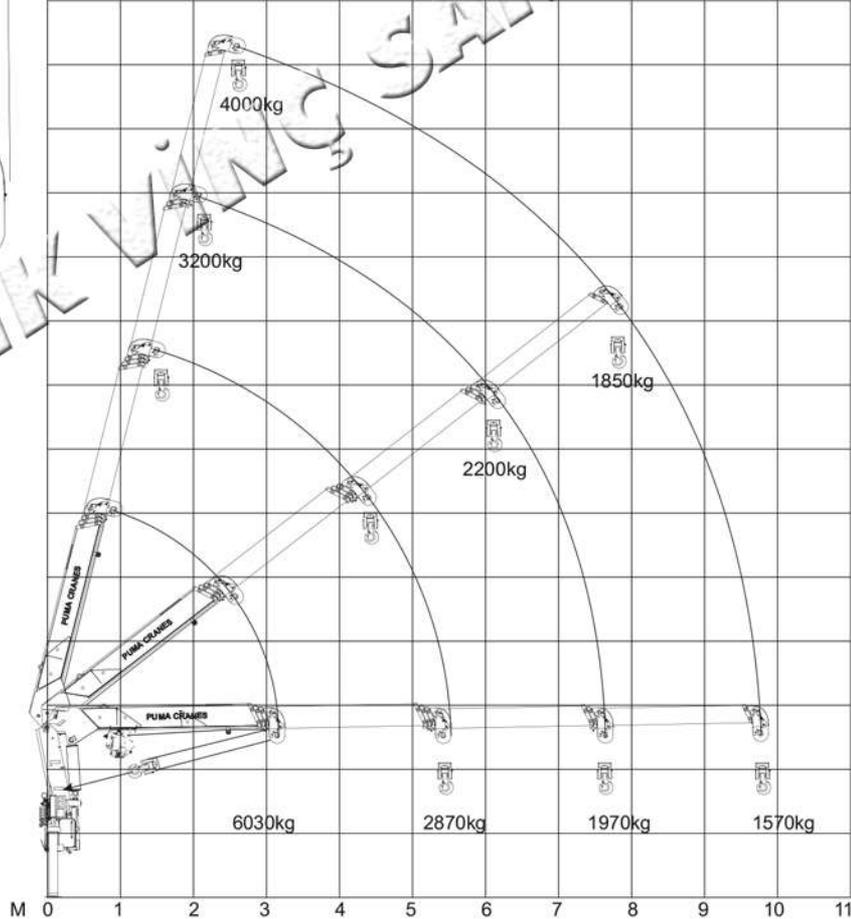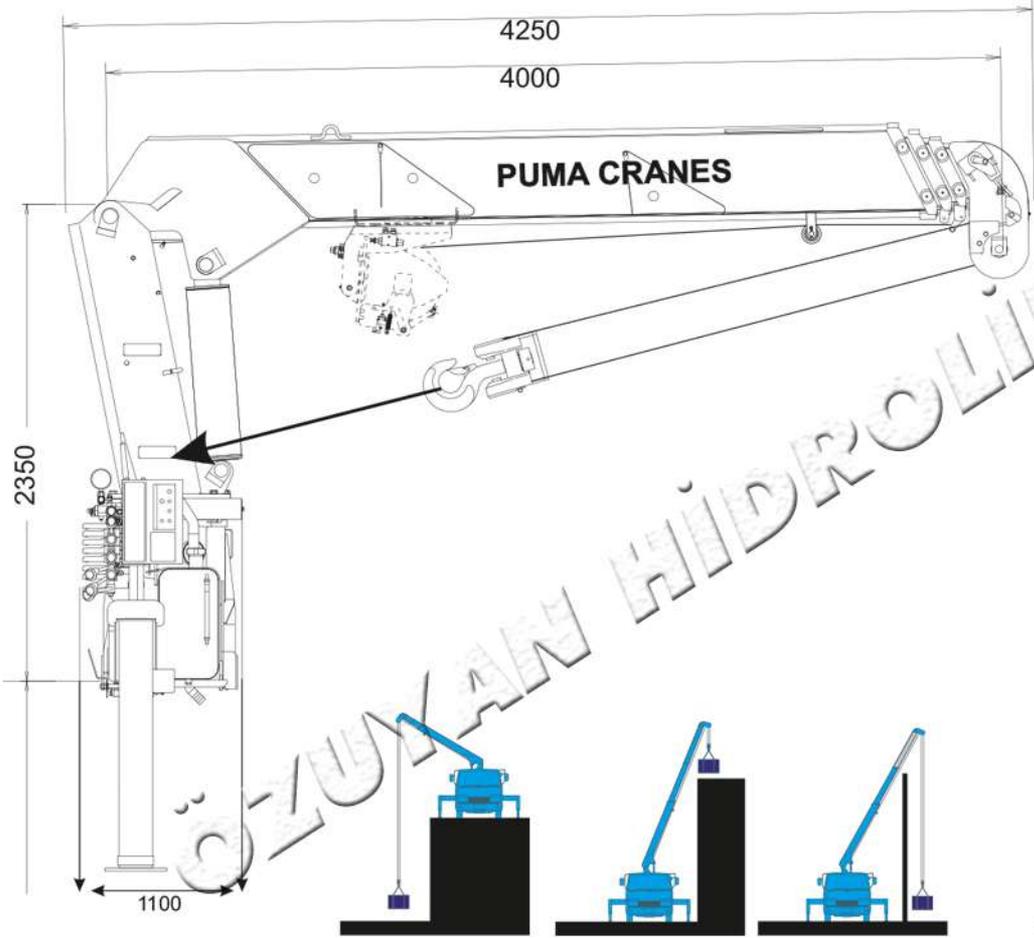


PMA 200-B3 TELESKOBİK

PUMA CRANES

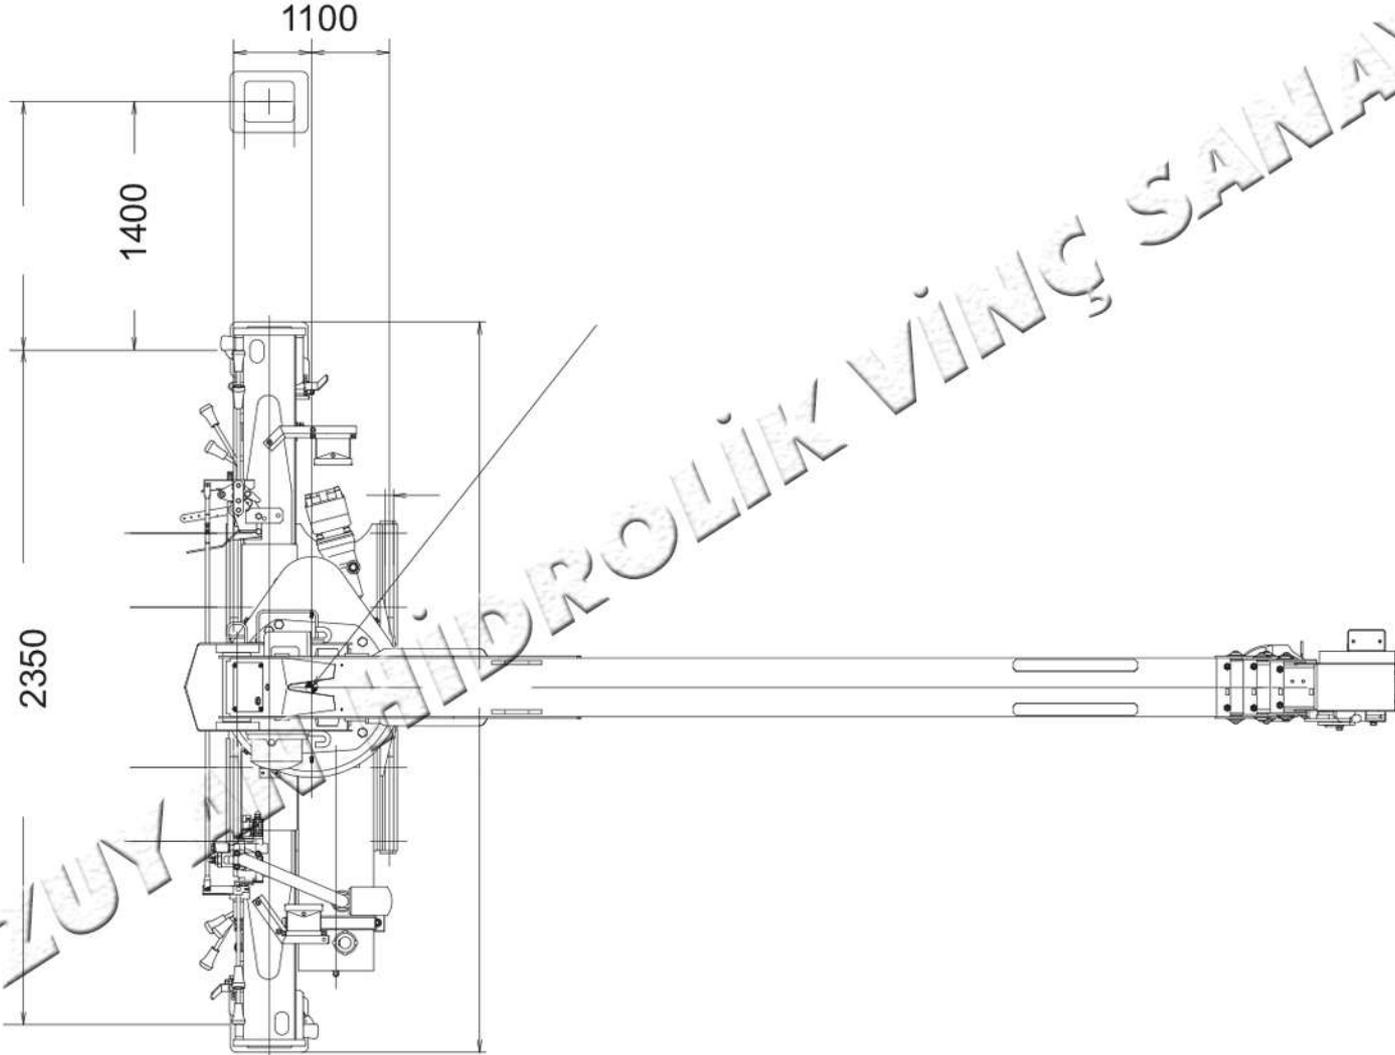


PMA 250-B3 TELESKOBİK

PUMA CRANES

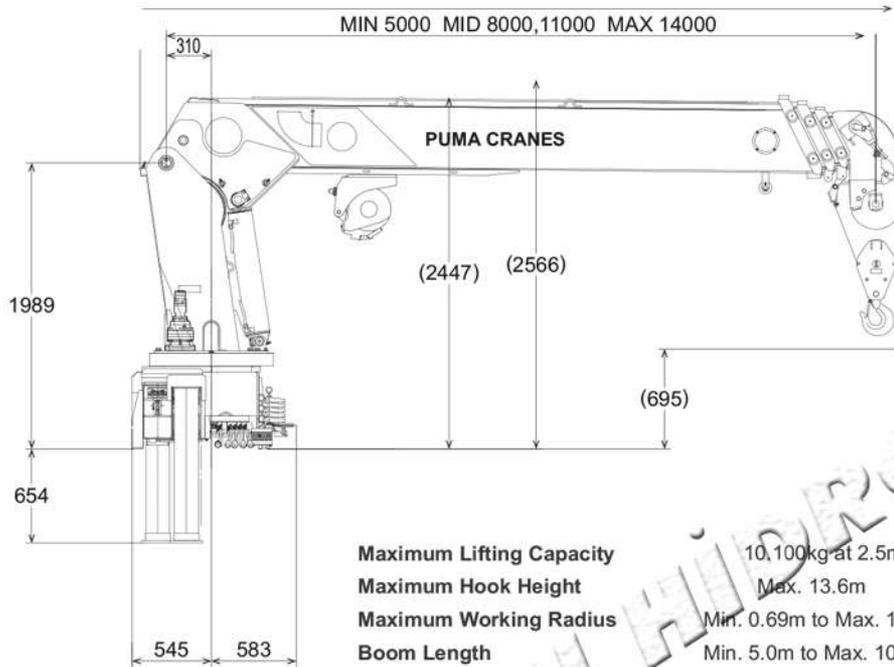


Maximum Lifting Capacity	10,100kg at 2.5m
Maximum Hook Height	Max. 13.6m
Maximum Working Radius	Min. 0.69m to Max. 13.6m
Boom Length	Min. 5.0m to Max. 10,0m
Boom Sections	3
Boom Raising Angle	Min. 0,6° to Max. 78°
Slewing Angle (Continuous)	360°


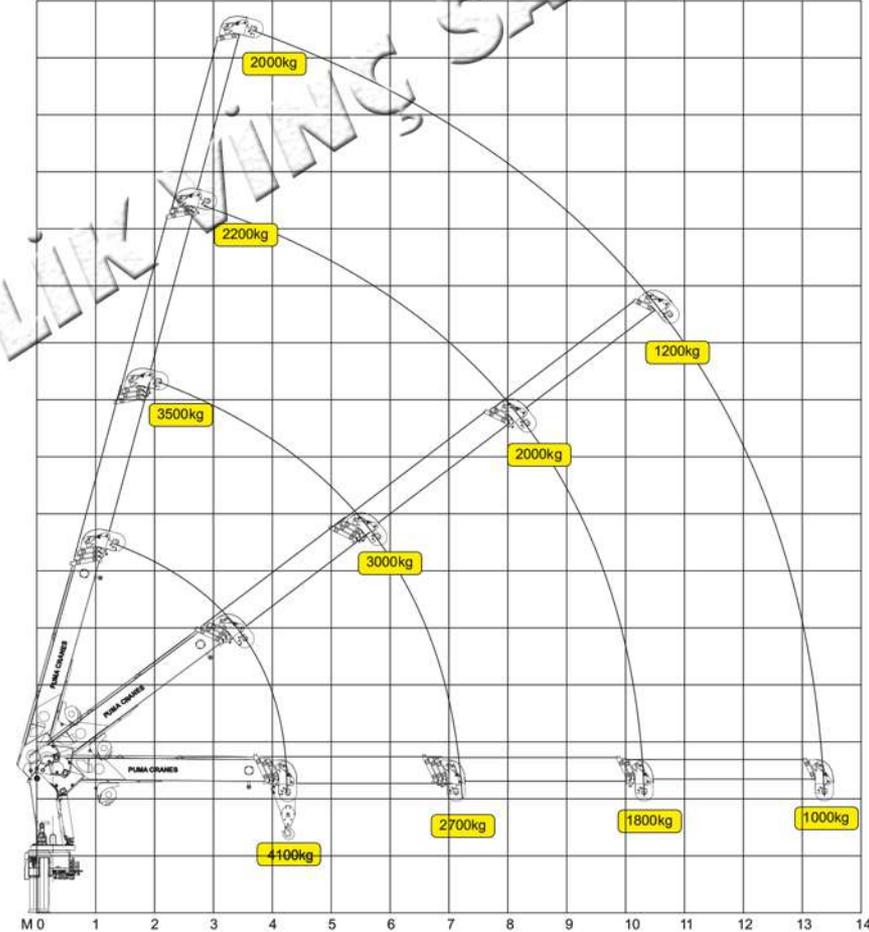


PMA 250-B3 TELESKOPİK




PUMA CRANES

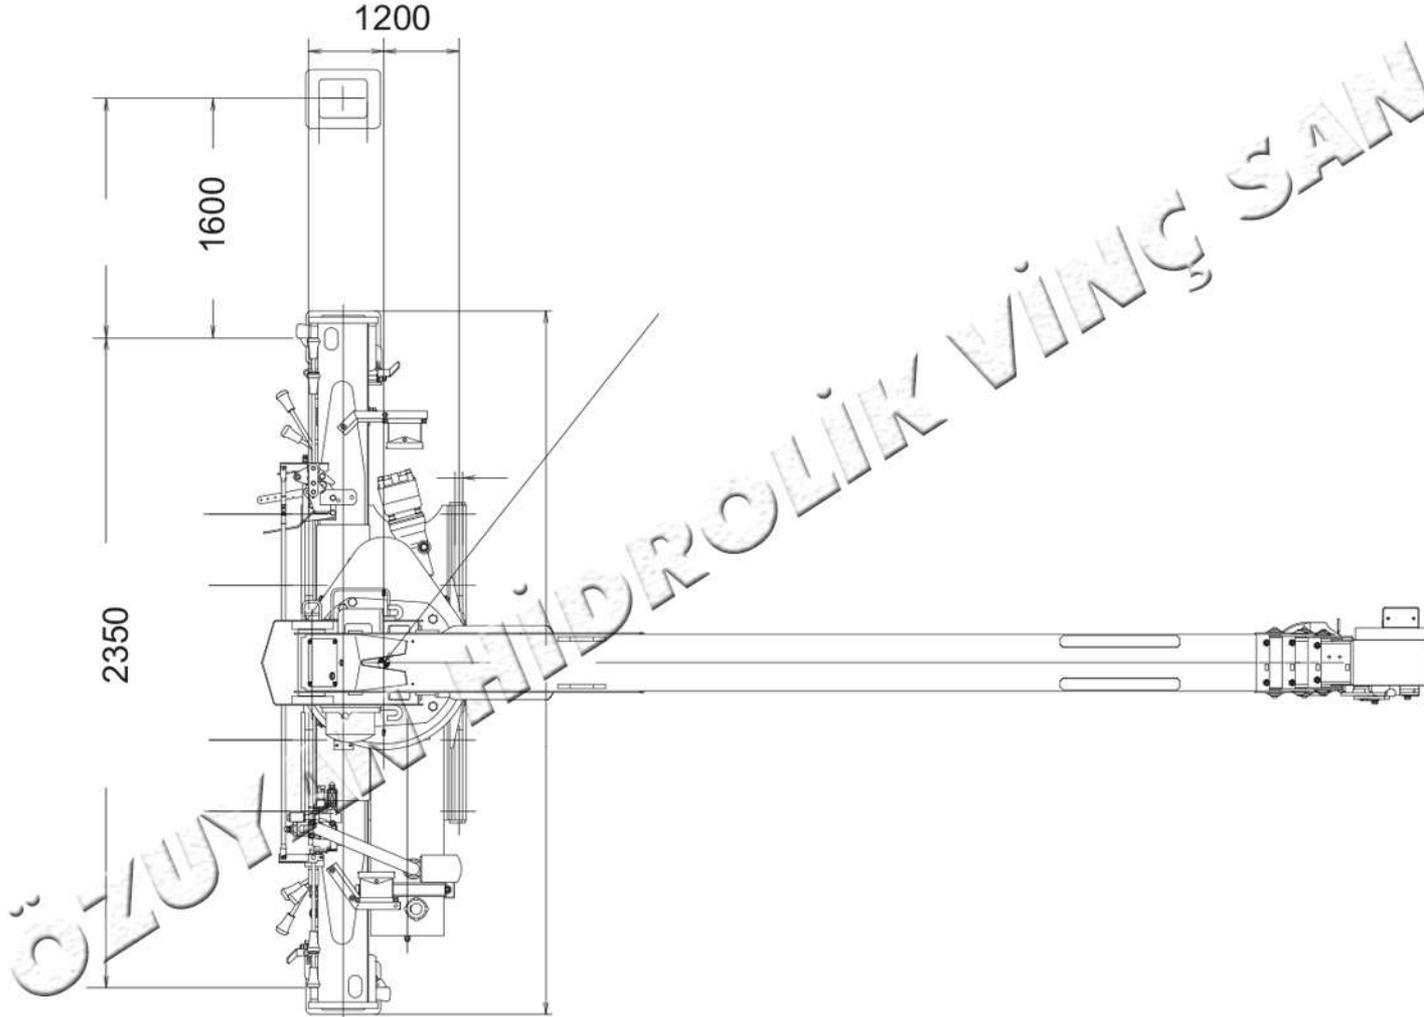

MODELS	LIFTING MOMENT tm	MAX VERTICAL REACH m	SLEWING ANGLE °	SLEWING TIME s/180°	MAX WORKING REEL m	WORKING PRESSURE bar	CRANE WEIGHT WITHOUT STABILIZERS kg	WEIGHT OF STABILIZERS kg	OIL TANK CAPACITY l	OIL FLOW l/min	DIMENSIONS mm B x h x S
PMA40(1T)	-	7,14	370	15	3	215	600	130	30	16	1966x1780x500

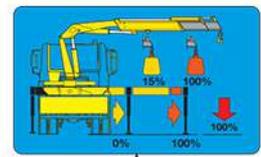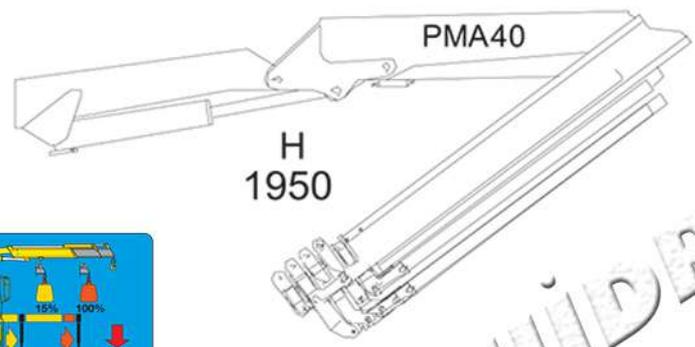



PMA40(1T) KNUCKLE BOOM CRANE

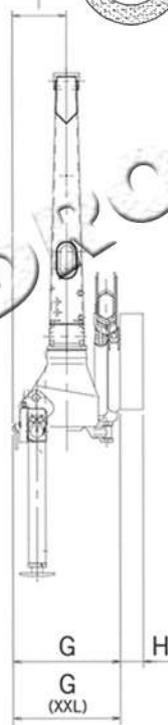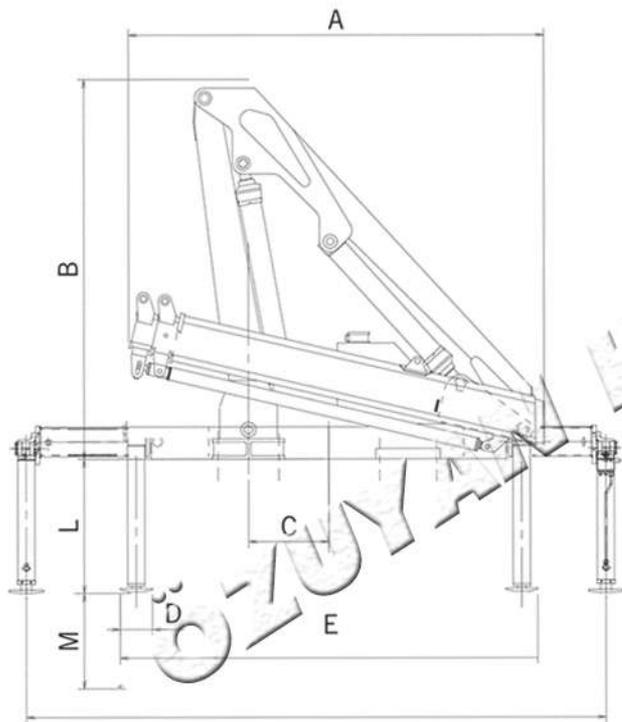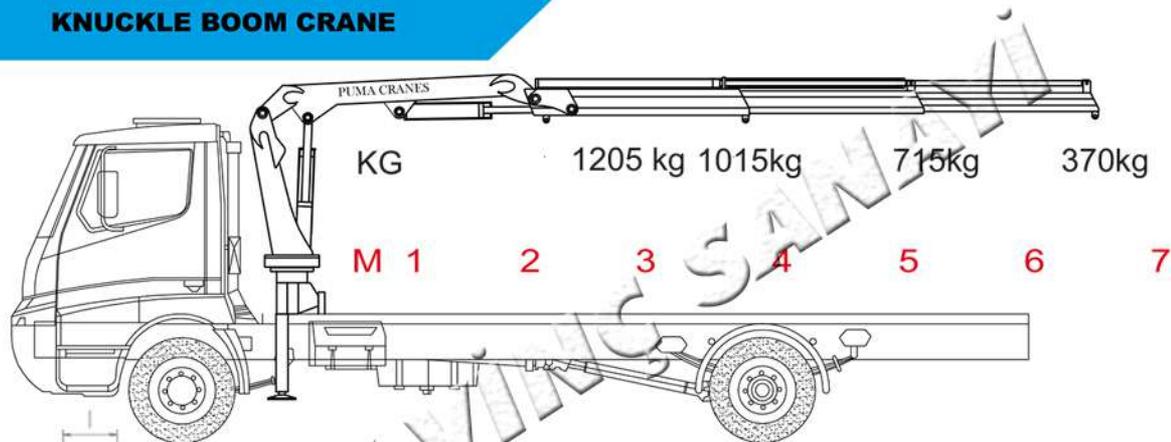




	PMA 40	B2
A		1940
B		1780
C		375
D		160
E (XXL)		2300
G		500
G (XXL)		560
H		120
I		253
L		700
M		450
EXTRA		3410
XXL		4795

PMA50(2T) KNUCKLE BOOM CRANE

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°		bar	kg	kg	l	l/min	mm B x h x S
PMA50(2T)		751	370	16	3	250	678	93	130	16	2025x1780x610

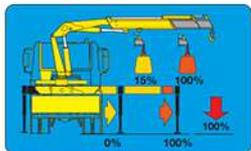
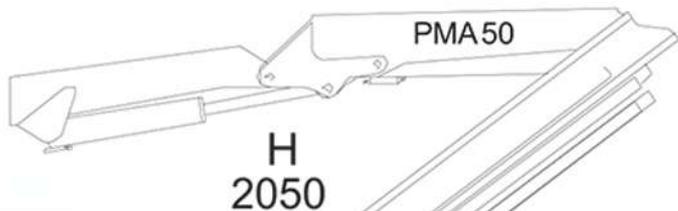


PMA50(2T) KNUCKLE BOOM CRANE

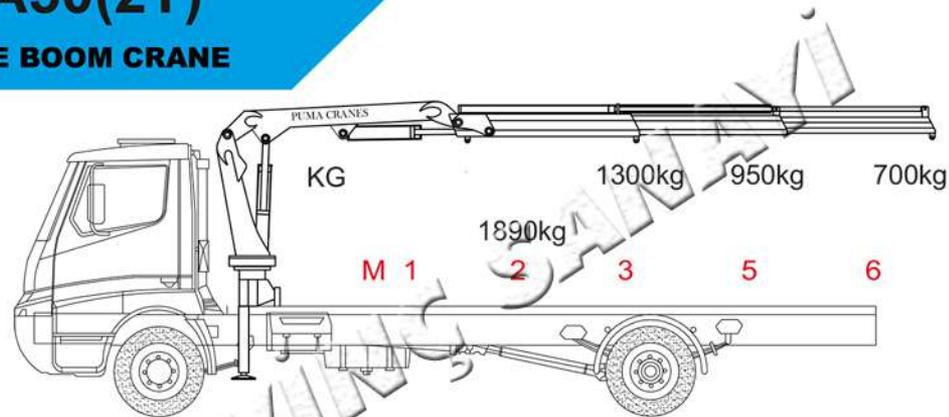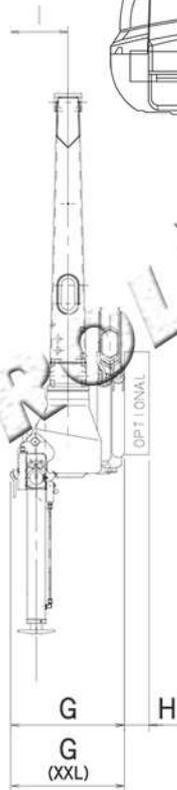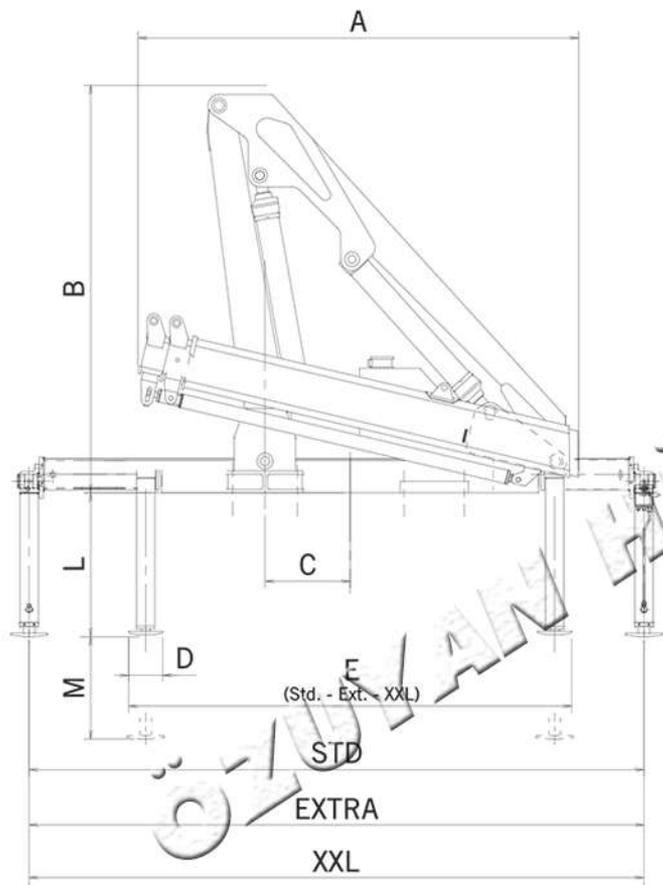



A	2025
B	1780
C	375
D	160
E (XXL)	2290
G	610
H	-
I	253
L	630
G (XXL)	670
STD	2970
XXL	4795

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°		bar	kg	kg	l	l/min	mm B x h x S
PMA70(3T)	7,3	8,45	400	15	4	265	1020	165	35	20	2300x1960x600

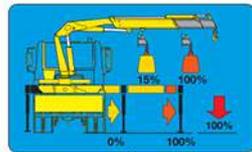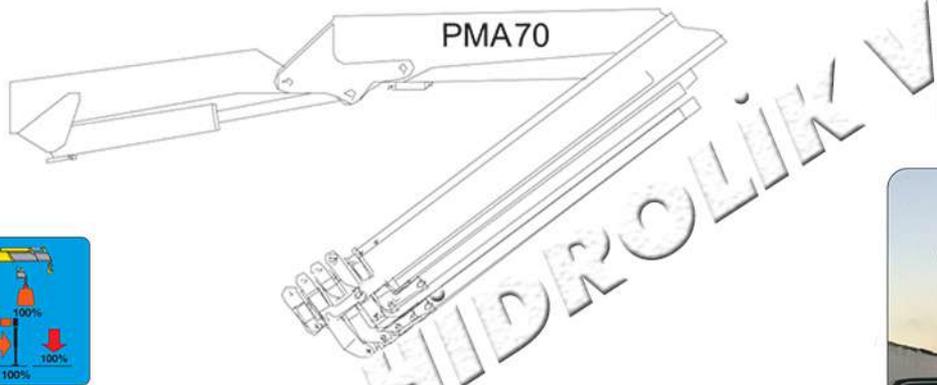


PMA70(3T)

KNUCKLE BOOM CRANE

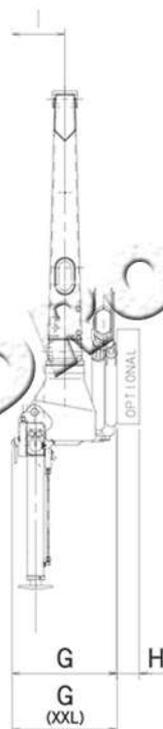
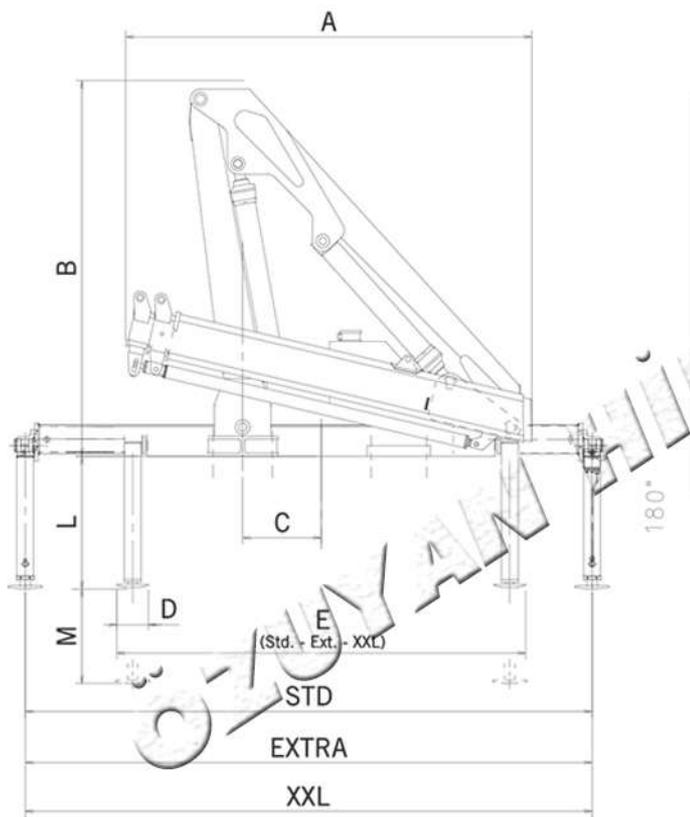


A	1940
B	1780
C	375
D	160
E (Std - Ext)	1950
	2292
G	500
H	120
I	253
L	630
G (XXL)	560
STD	2970
XXL	4795

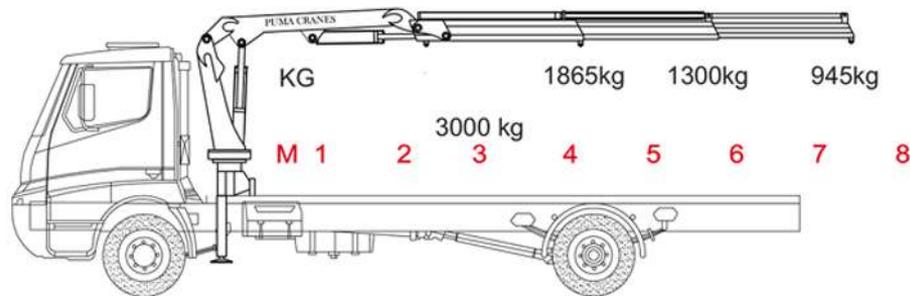




PMA80(4T) KNUCKLE BOOM CRANE

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°		bar	kg	kg	l	l/min	mm B x h x S
PMA80 4T	8.1	10.05	400	15	4	285	1100	285	85	20	2300x1960x800

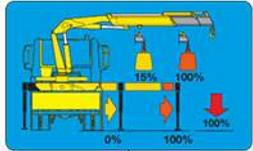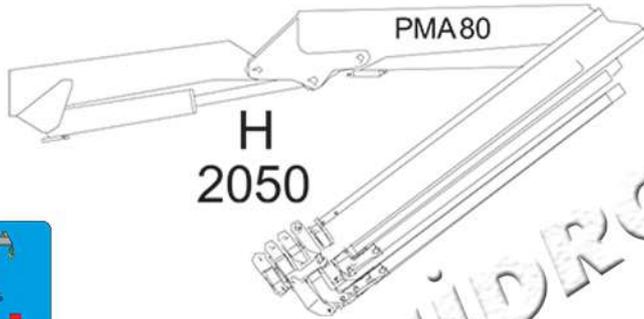

PMA80(4T)



KNUCKLE BOOM CRANE

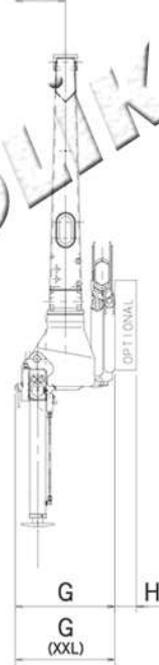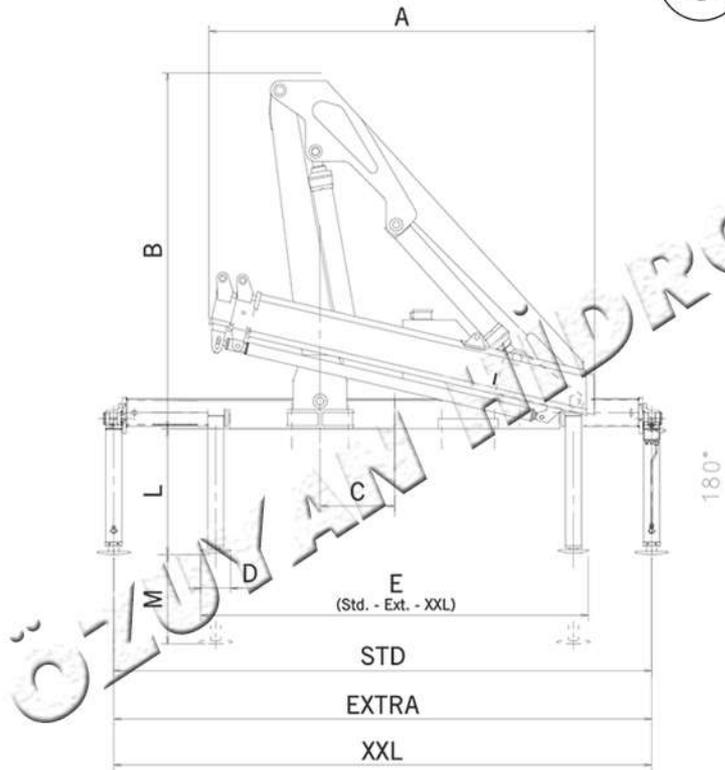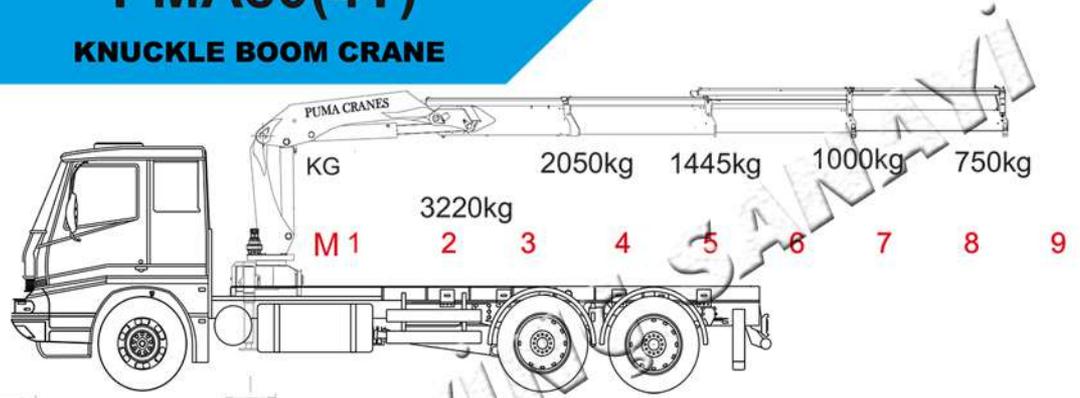

A	2310
B	1960
C	300
D	150
E	2300
F	3370
G	820
H	400
I	600
L	725 OPT.
M	490
EXTRA	4600



PMA100(4,2T) KNUCKLE BOOM CRANE

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°		bar	kg	kg	l	l/min	mm B x h x S
PMA100	10	10,05	400	15	4	285	1400	285	155	20	2250x2200x85

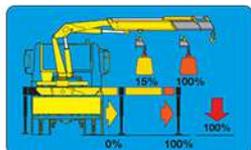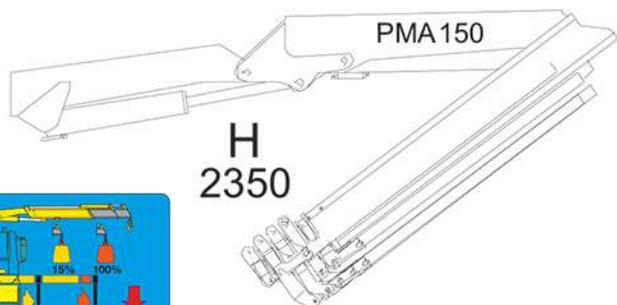

PMA100(4,2T)



KNUCKLE BOOM CRANE

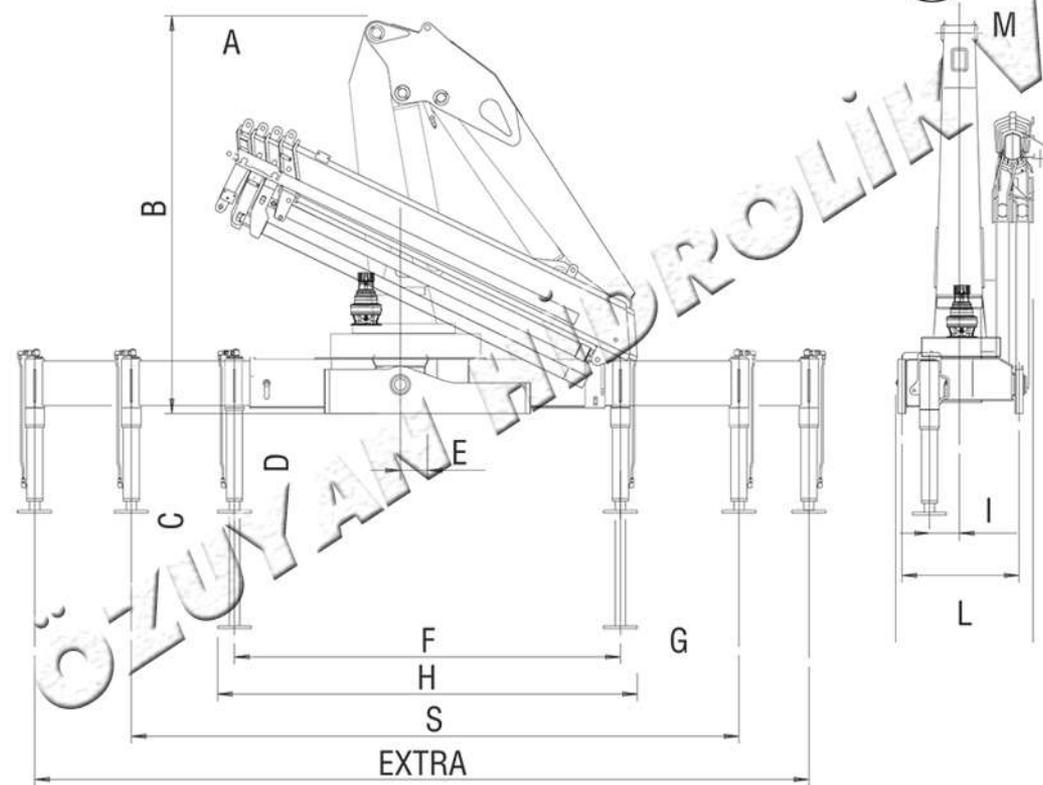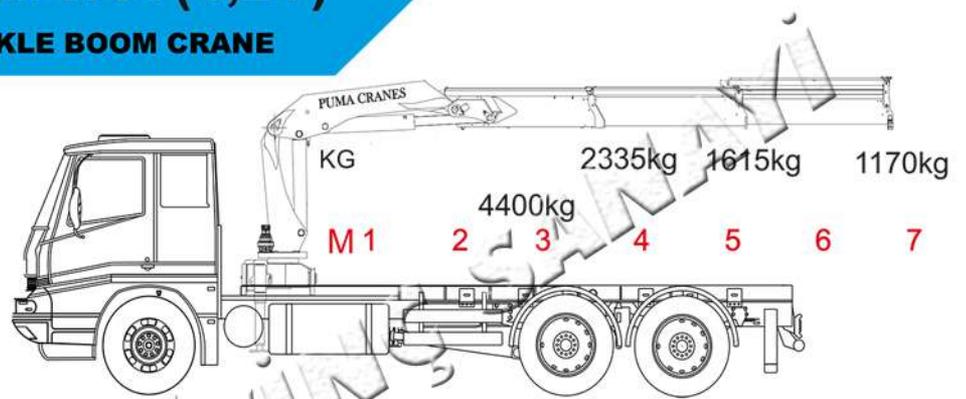


A	2260
B	2200
C	300
D	150
E	2300
F	2250
G	820
H	400
I	600
L	725 OPT.
M	490
N	1040
EXTRA	4600

PMA150(5T) KNUCKLE BOOM CRANE

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°		bar	kg	kg	l	l/min	mm B x h x S
PMA150 5T	15,00	10,05	400	15	4	285	1850	285	35	150	2300x2400x1000

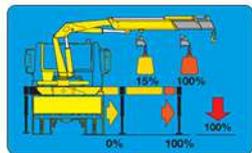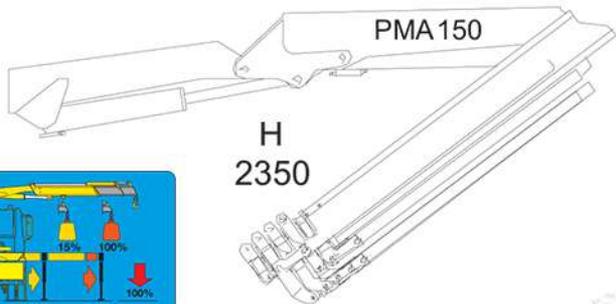



PMA150(5T) KNUCKLE BOOM CRANE

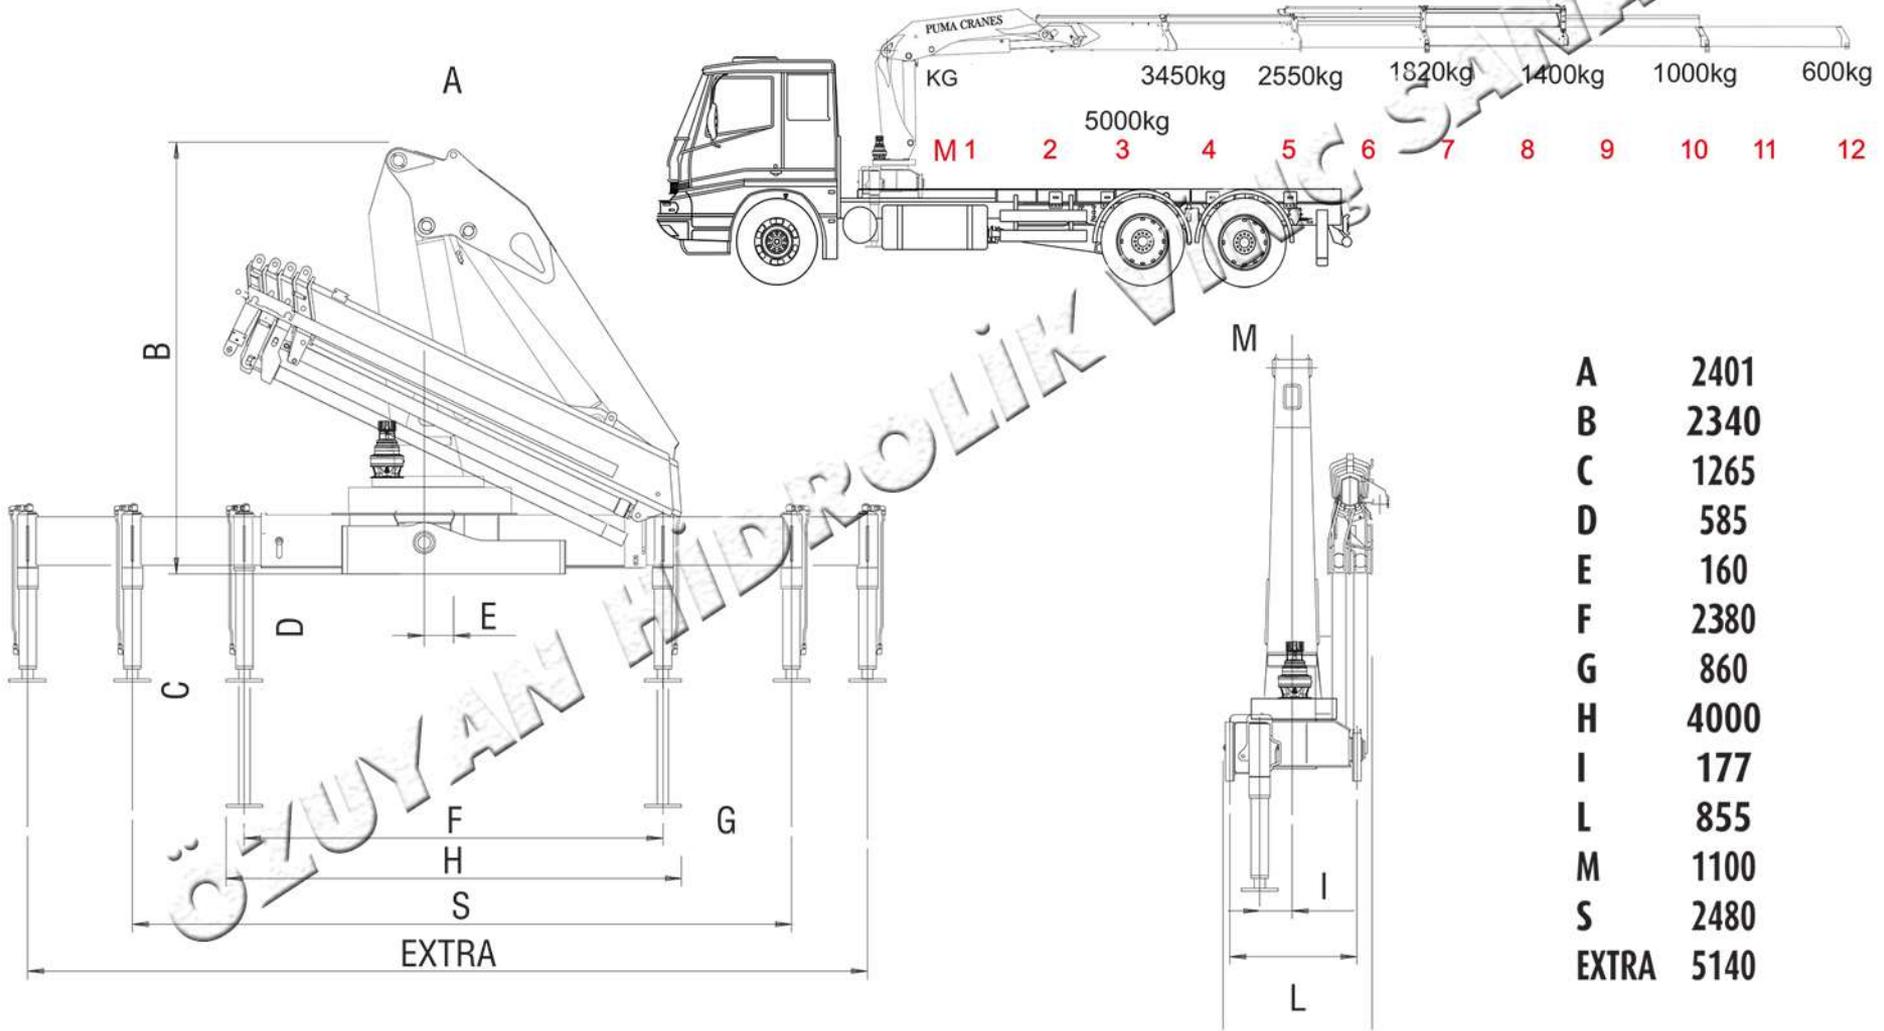


A	2401
B	2340
C	1265
D	585
E	160
F	2380
G	860
H	4000
I	177
L	855
M	1100
S	2480
EXTRA	5140

PMA170(7T) KNUCKLE BOOM CRANE


MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°		bar	kg	kg	l	l/min	mm B x h x S
PMA170 (7T)	17	13,8	360	17	4	300	400	360	130	40	2480x2300x1100

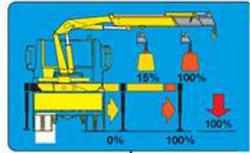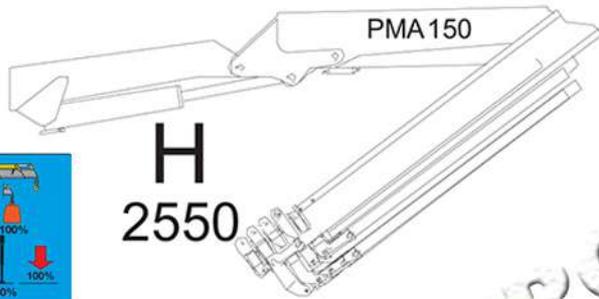


PMA170(7T) KNUCKLE BOOM CRANE

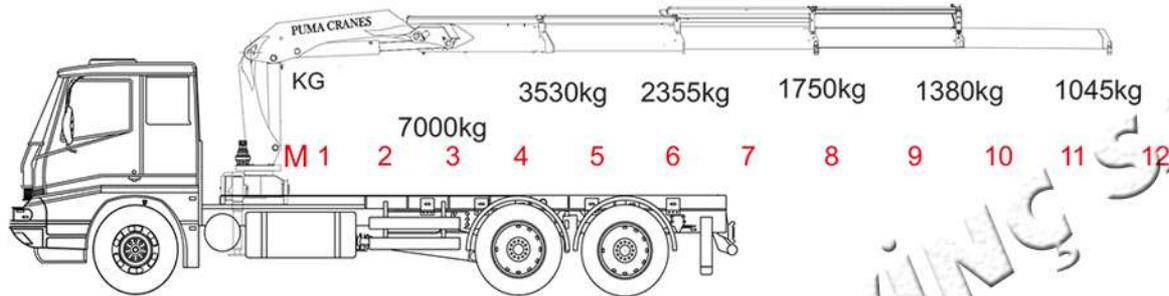



- A 2370
- B 2295
- C 1244
- D 624
- E 150
- F 2300
- G 1600
- H 5500
- I 380
- L 1000
- M 1100
- S 2480

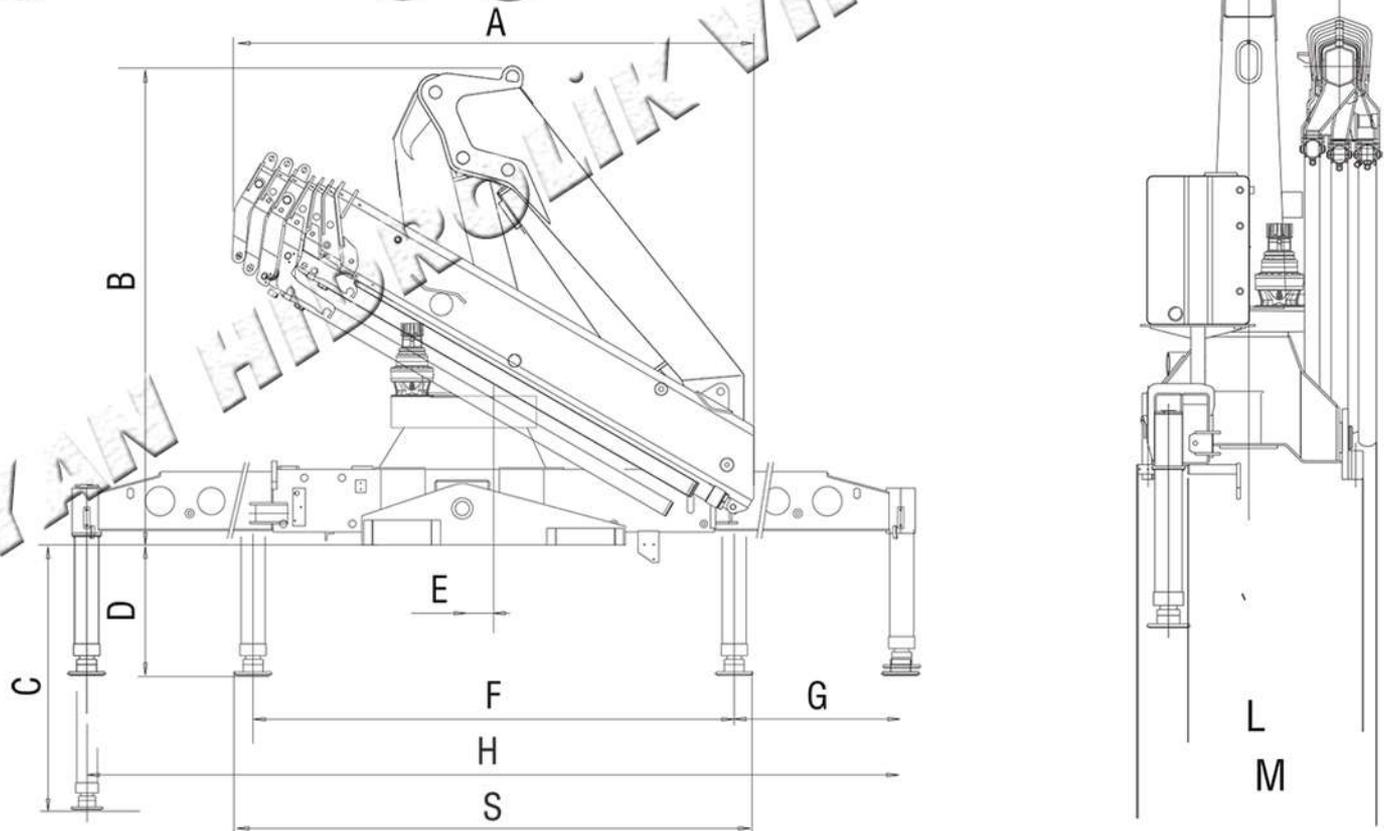

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SWINGING ANGLE	SWINGING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°		bar	kg	kg	l	l/min	mm B x h x S
PMA 200-B4	20t/mt	14	360°	22		300	2820	220	250	60	2500x3000x1300

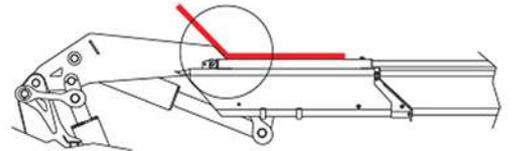



Second boom with negative angle in order to simplify operations in difficult access conditions

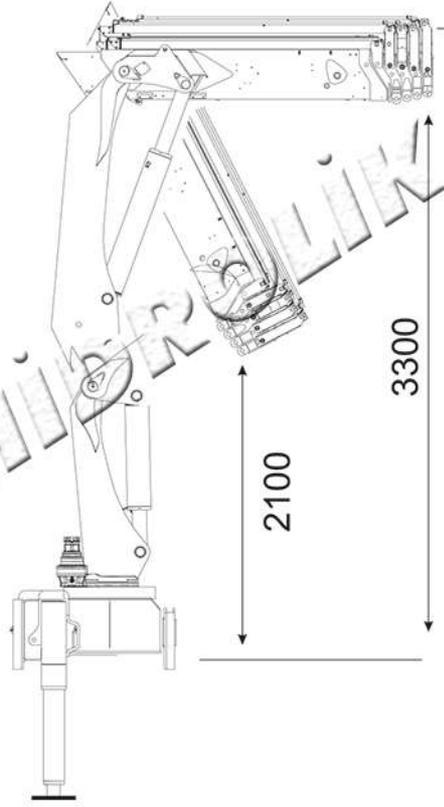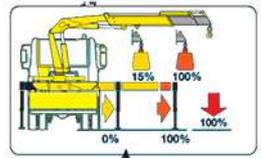


5300




PUMA (PMA200) KNUCKLE BOOM MARINE CRANE

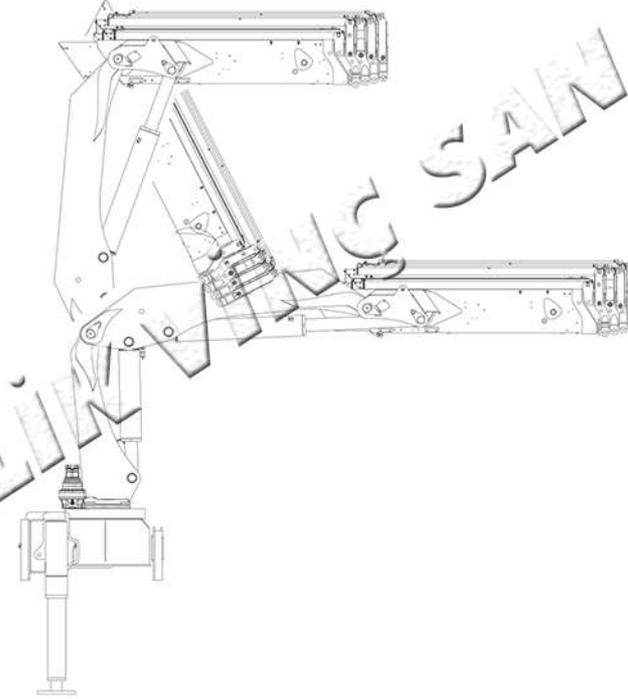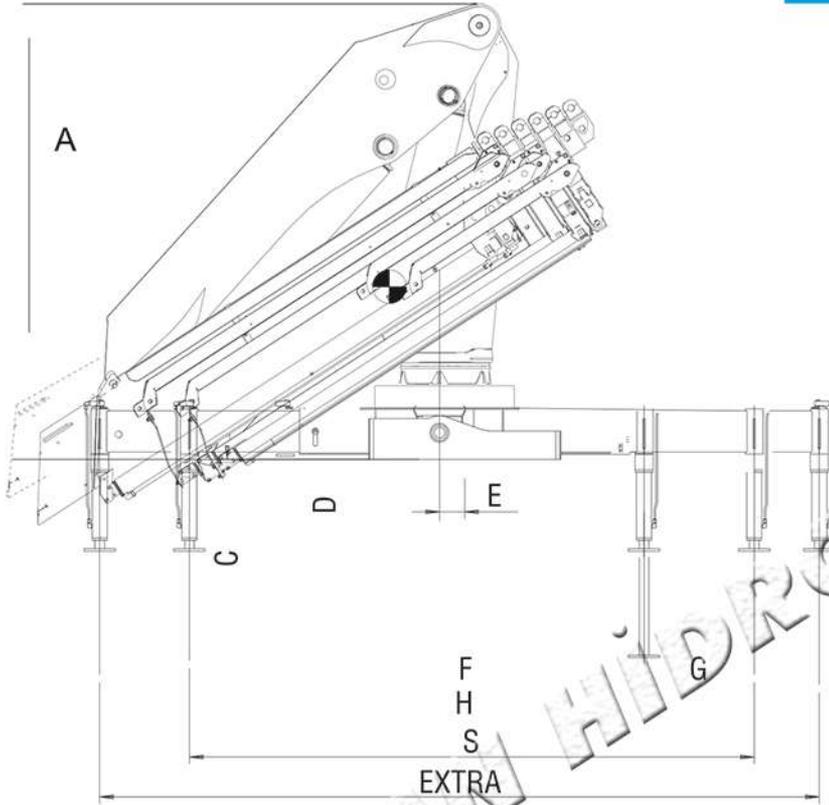

A	2401
B	2340
C	1265
D	585
E	160
F	2380
G	860
H	4000
I	177
L	855
M	1100
S	2480
EXTRA	5140

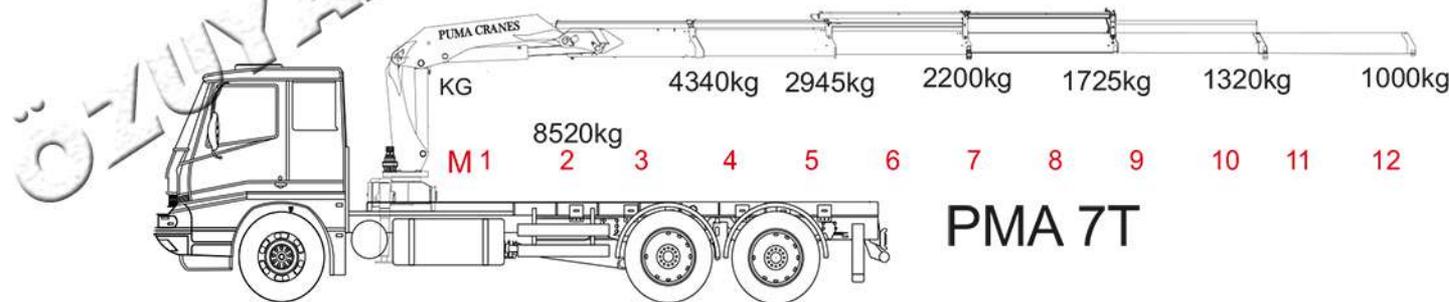

MODELS	LIFTING MOMENT tm	MAX VERTICAL REACH m	SLEWING ANGLE °	SLEWING TIME s/180°	MAX WORKING HEEL °	WORKING PRESSURE bar	CRANE WEIGHT WITHOUT STABILIZERS kg	WEIGHT OF STABILIZERS kg	OIL TANK CAPACITY l	OIL FLOW l/min	DIMENSIONS mm B x h x S
PMA 330-B4	33,4	15	360	22	4	305	4600	760 Extra	210	50	2505x2450x1450

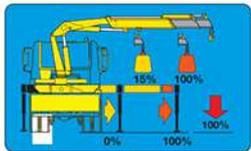


PUMA CRANE

5549 sk no 61/1/3 Yedieylü, Mah Torbalı/İZMİR


Telephone: + (90) 0 232 461 10 63
Gsm + (90) 0 532 672 65 86

otovinc@gmail.com
www.pumacrane.com
info@ozuyan.com


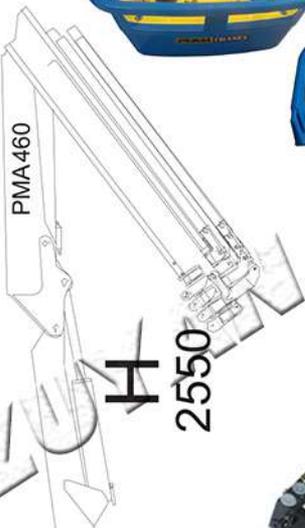


PMA330(12T)


KNUCKLE BOOM CRANE

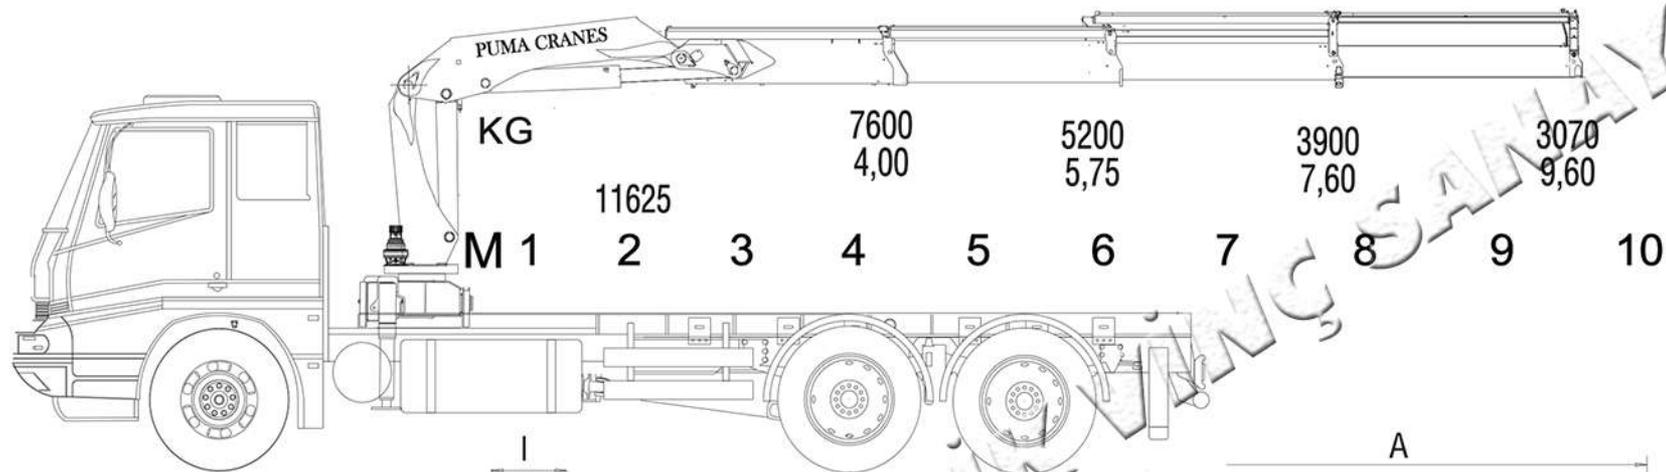



- A 2500
- B 2355
- C 1486
- D 694
- E 150
- F 2300
- G 1950
- H 6200
- I 1170
- L 1330

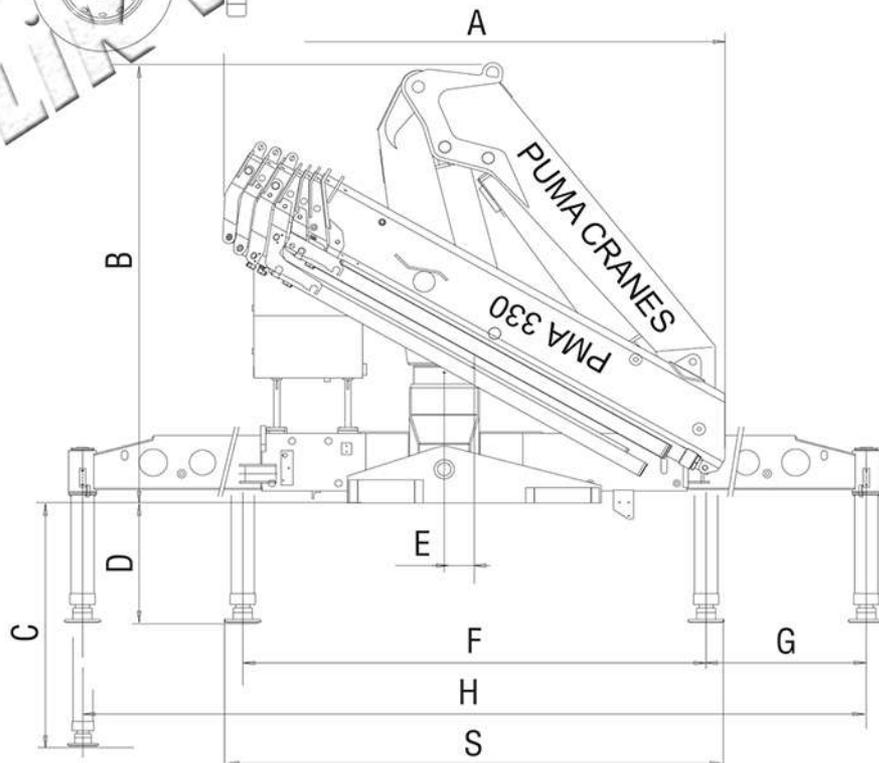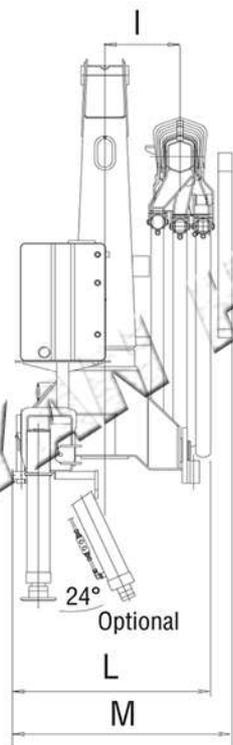

MODELS	LIFTING MOMENT tm	MAX VERTICAL REACH m	SEWING ANGLE °	SEWING TIME s/180°	MAX WORKING REEL 4	WORKING PRESSURE bar	CRANE WEIGHT WITHOUT STABILIZERS kg	WEIGHT OF STABILIZERS kg	OIL TANK CAPACITY l	OIL FLOW l/min	DIMENSIONS mm B x h x S
PMA 250-B4	25t/mt	14	360°	22	4	300	3640	250	150	40	2500x3100x1400

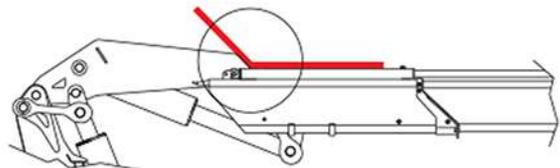


Second boom with negative angle in order to simplify operations in difficult access conditions

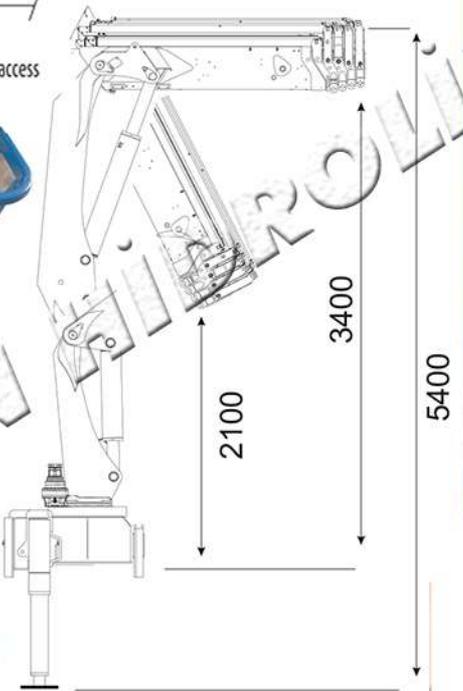
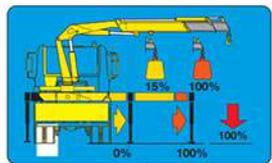


PUMA (PMA250) KNUCKLE BOOM MARINE CRANE




MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°		bar	kg	kg	l	l/min	mm B x h x S
PMA 250-B4	25t/mt	14	360°	22	4	300	3640	250	150	40	2500x3100x1400

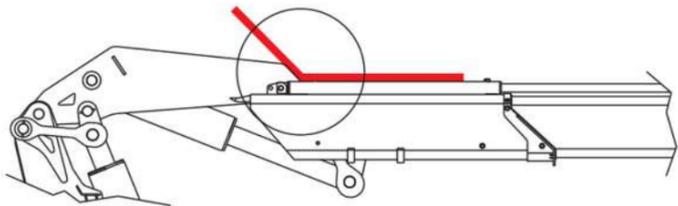


Second boom with negative angle in order to simplify operations in difficult access conditions

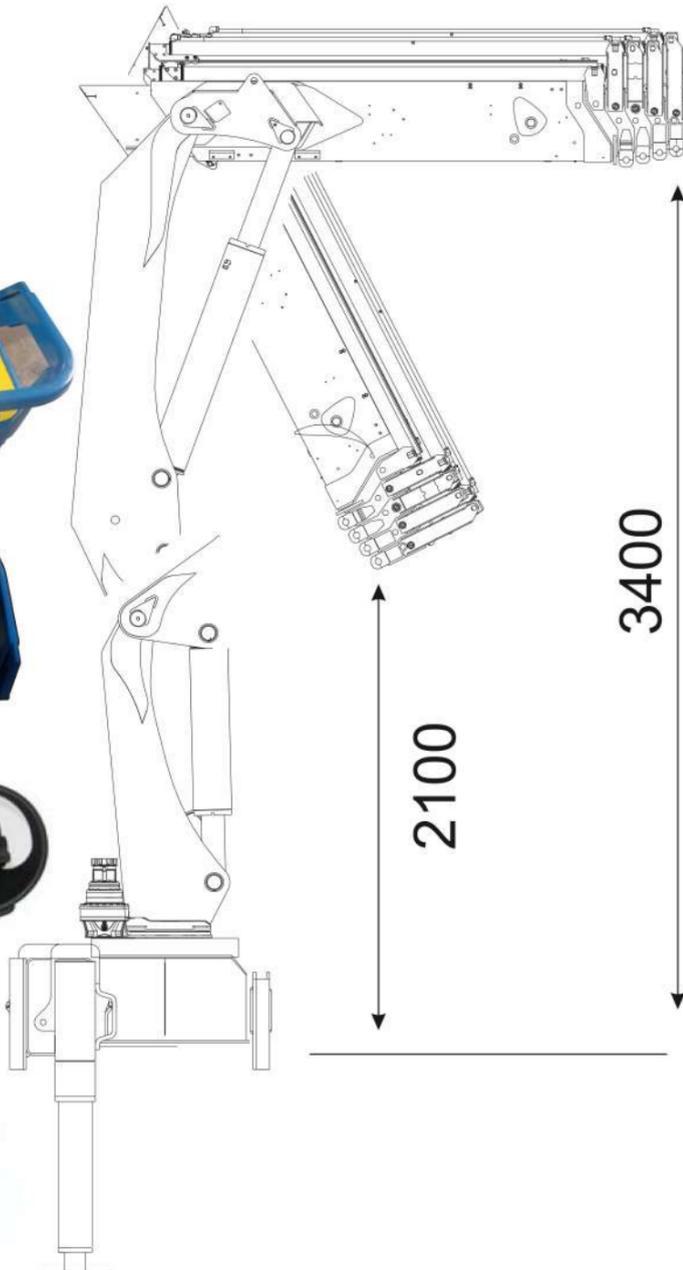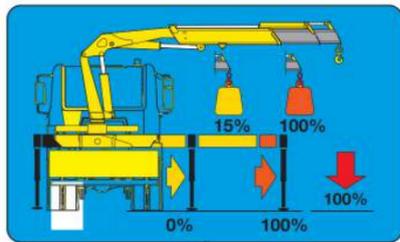



PMA 10 T

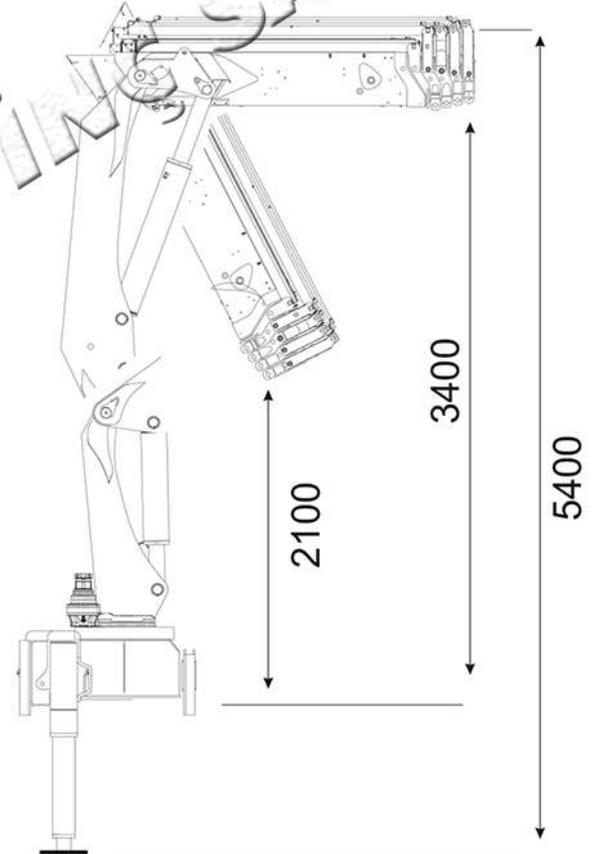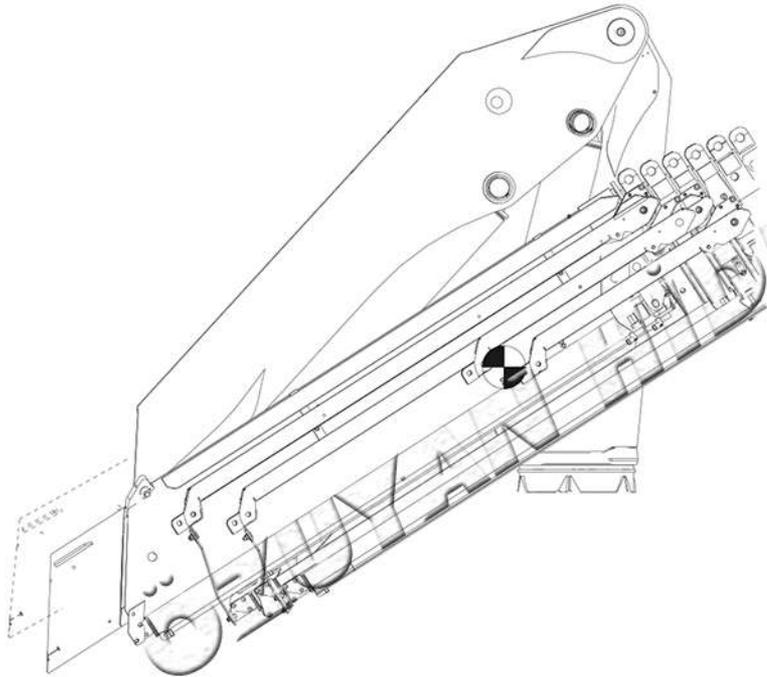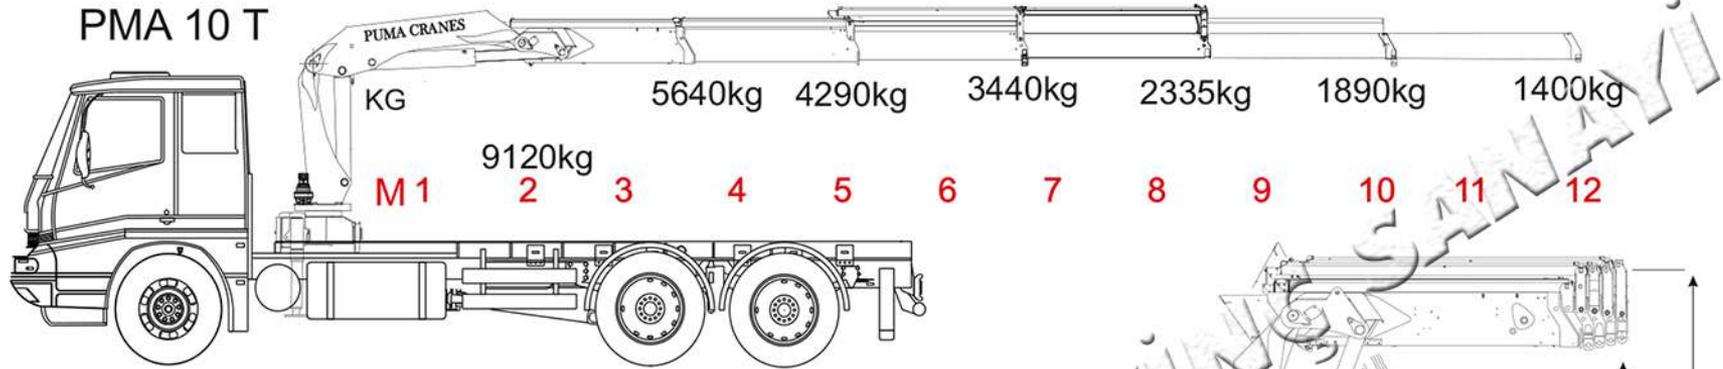

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING REEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	bar	kg	kg	l	l/min	mm B x h x S	
PMA 250-B3-JiP 1	25t/mt	14	360°	22	4	300	3890	250	150	40	2500x3100x1400

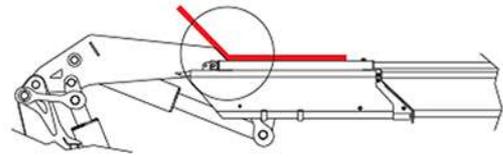


Second boom with negative angle in order to simplify operations in difficult access conditions

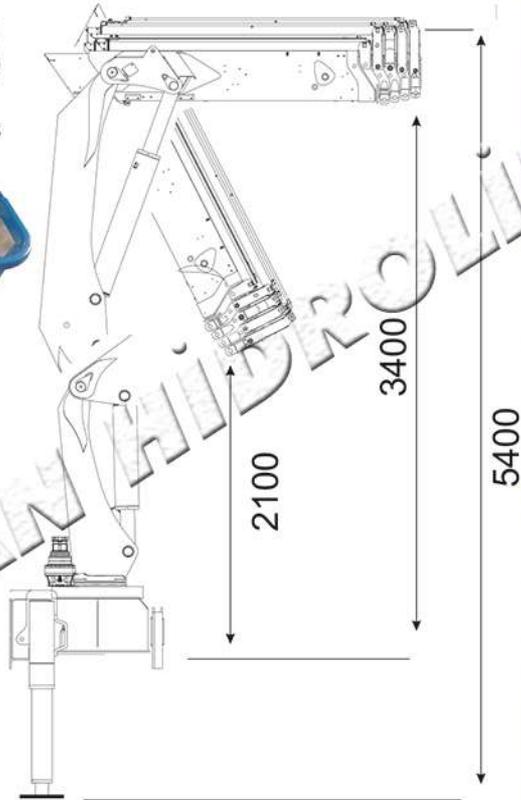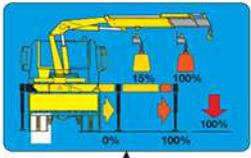

PUMA (PMA250JIP)

KNUCKLE BOOM MARINE CRANE



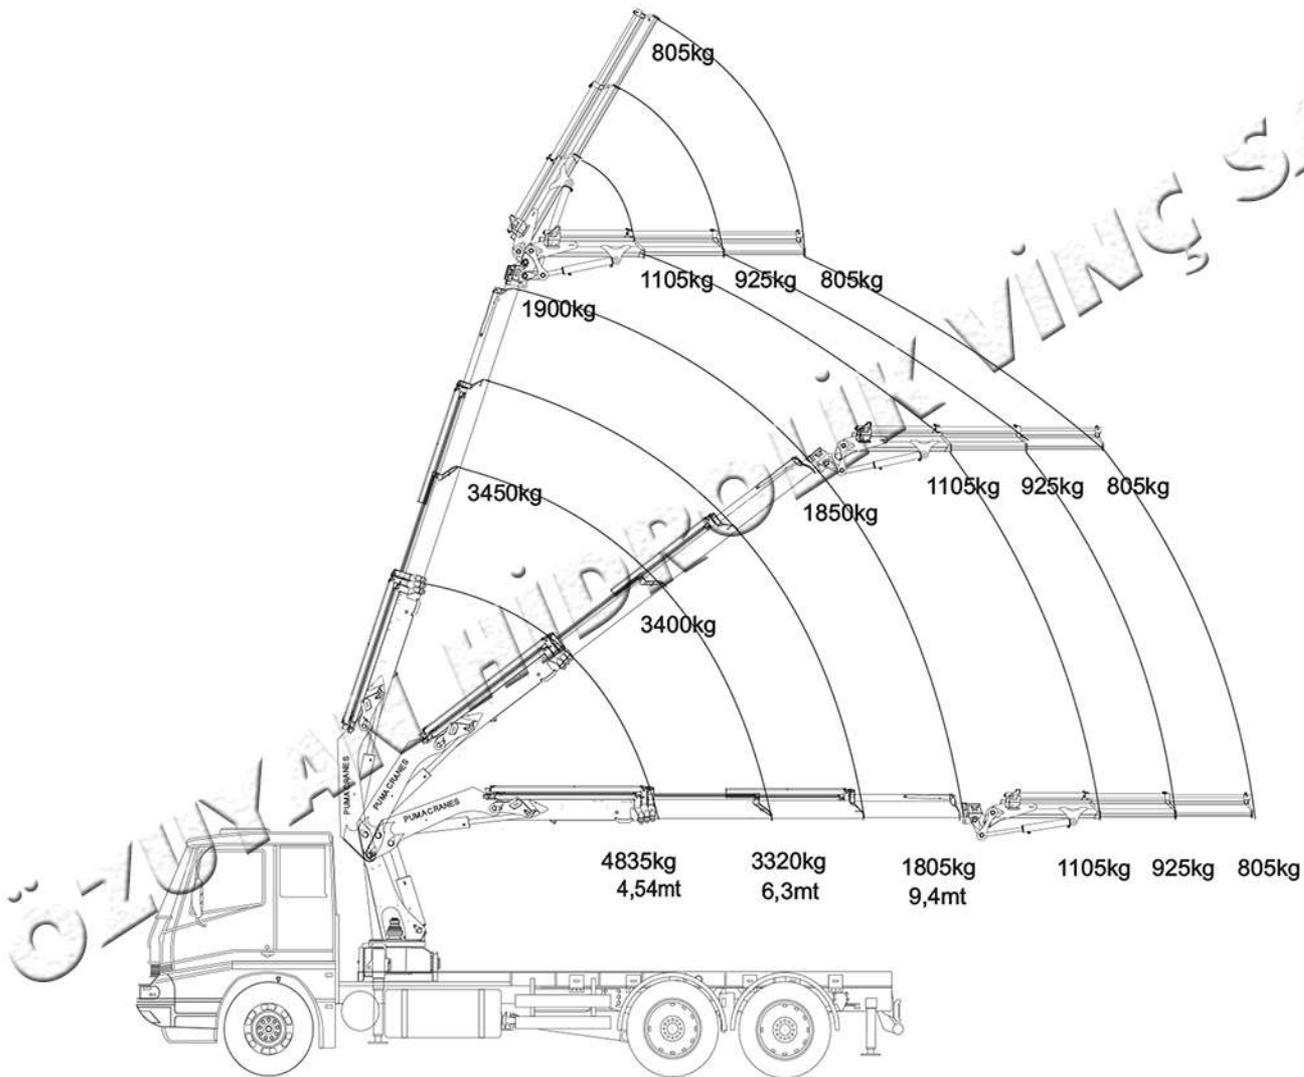


ÖZEL İNŞAAT VE SANAYİ

PMA460(15T)




KNUCKLE BOOM CRANE

- A 2455
- B 2460
- C 1462
- D 875
- E 95
- F 2263
- G 2503
- H 5050
- I 1285
- EXTRA 7400

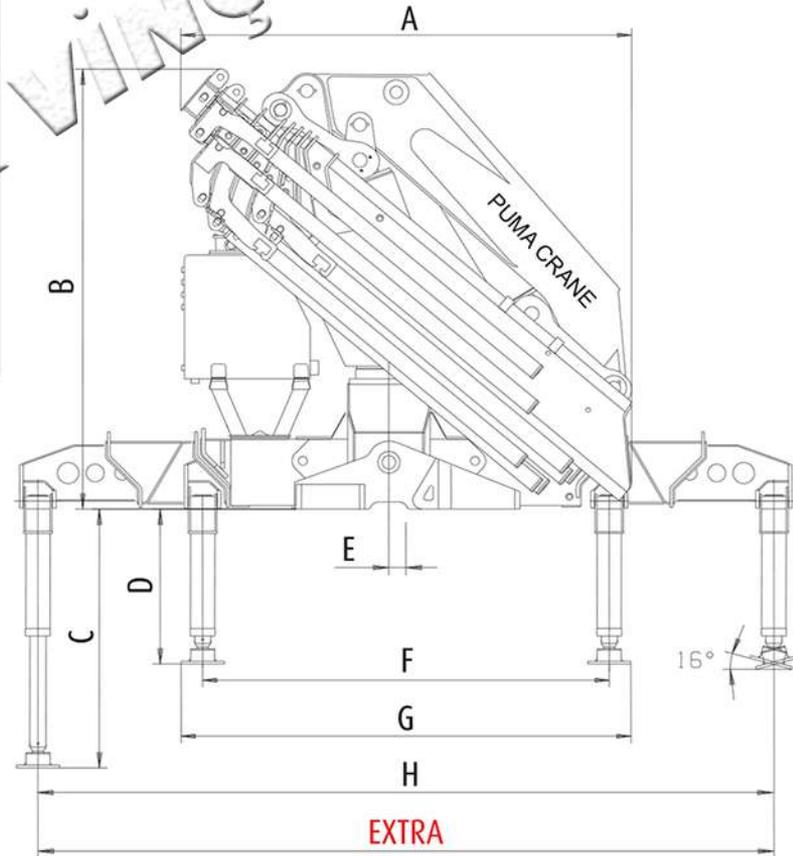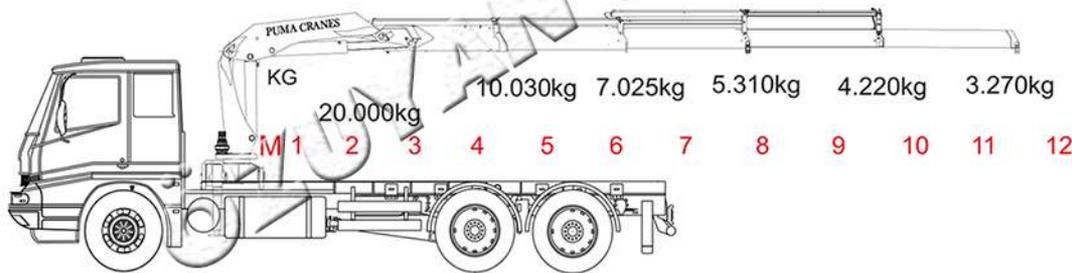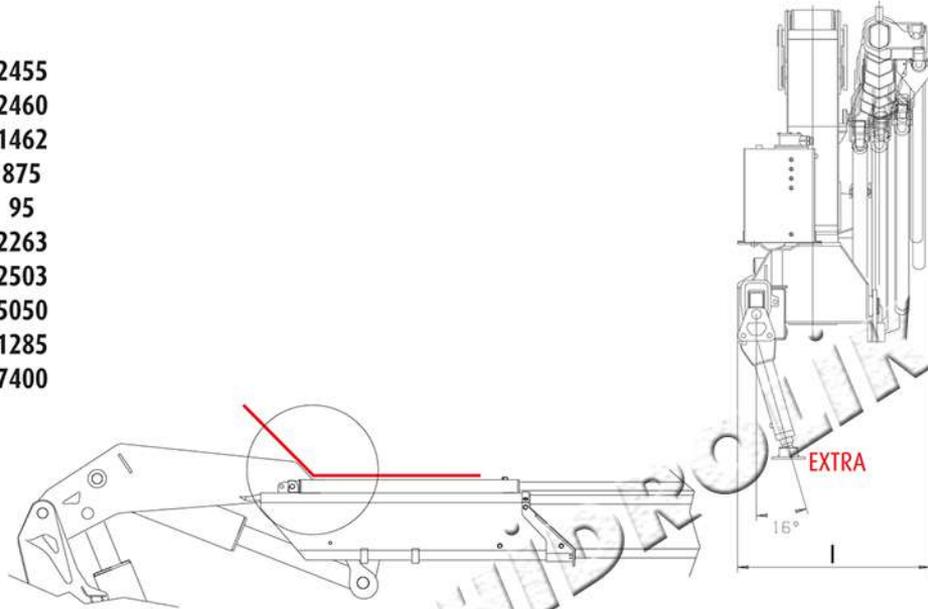



HIDROKLIK VİNG SANAYİ

HIDROKLIK VİNG SANAYİ

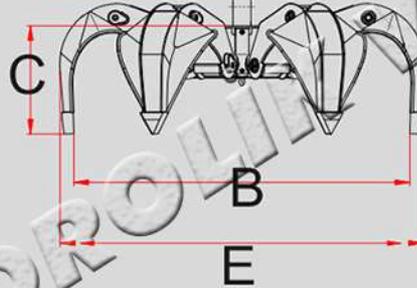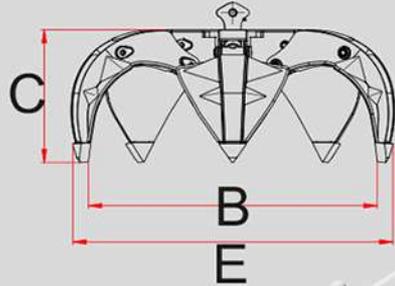
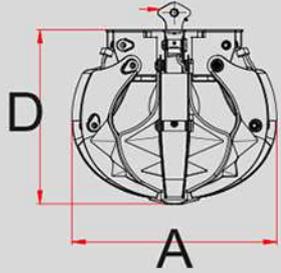


KOL TEETH	CAPACITY		VEIGHT KG	OIL FLOW LT/MIN	TON	TON	A mm	B mm	C mm	D mm	E mm	FxL mm
	LT	KG										
4	90	750	81	20	0,15-0,3	1,0-2,0	650	1010	430	580	1090	25x30
4	110	900	105	25	0,25-0,5	2,0-3,0	730	1130	480	650	1230	25x30
5	110	1500	118	30	0,25-0,5	2,0-3,0	730	1130	480	650	1230	25x30
4	120	900	112	25	0,3-0,6	2,5-4,0	743	1240	497	700	1340	25x30
5	120	1500	130	30	0,3-0,6	2,5-4,0	743	1240	497	700	1340	25x30
4	160	1500	230	50	0,3-0,8	3,0-5,0	900	1300	550	750	1400	30x60
5	160	2000	265	60	0,4-1,0	3,0-5,0	900	1300	550	750	1400	30x60
4	205	1500	250	50	0,5-1,1	3,0-6,0	920	1560	600	890	1650	30x60
5	205	2000	275	60	0,6-1,2	3,0-6,0	920	1560	600	890	1650	30x60
4	270	2000	310	60	0,7-1,3	4,0-7,0	1000	1490	650	900	1640	32x80
5	270	2500	350	70	0,8-1,6	4,0-7,0	1000	1490	650	900	1640	32x80
4	325	2500	375	60	1,0-2,0	6,0-9,0	1120	1630	680	930	1760	32x80
5	325	3000	415	70	1,0-2,0	6,0-9,0	1120	1630	680	930	1760	32x80
4	400	2500	420	60	1,0-3,0	7,0-12	1240	1780	760	970	1940	32x80
5	400	3000	450	70	1,0-3,0	7,0-12	1240	1780	760	970	1940	32x80




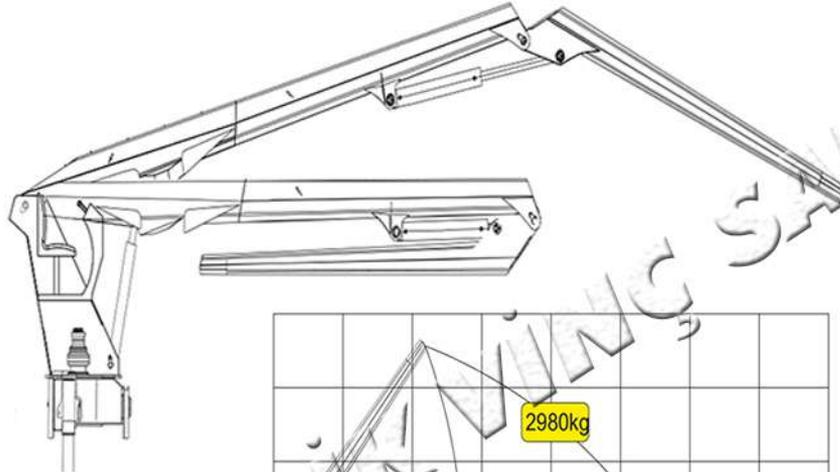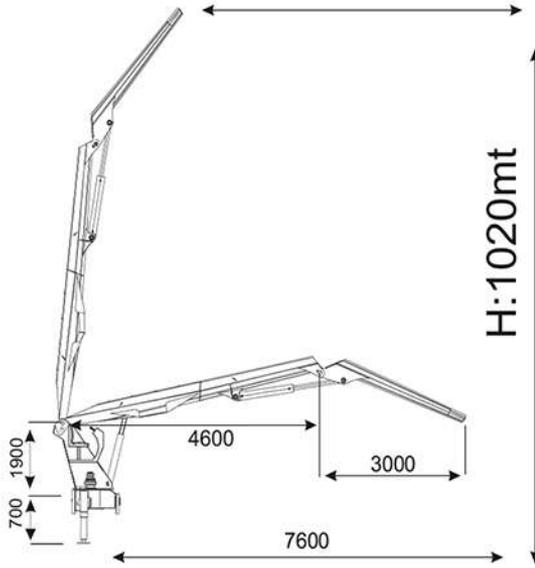




MODEL	VALUES	UNIT
PMA ATS 230	23	lim
LIFTING MOMENT	8	m
MAX VERTICAL REACH	360	°
SLEWING ANGLE	36	s/360°
SLEWING TIME	310	hour
MAX WORKING HEEL	2630	kg
WORKING PRESSURE	620	kg
CRANE WEIGHT WITHOUT STABILIZERS	160	l
WEIGHT OF STABILIZERS	60	l/min
OIL TANK CAPACITY	2540x1000	mm
OIL FLOW		l x S
DIMENSIONS		

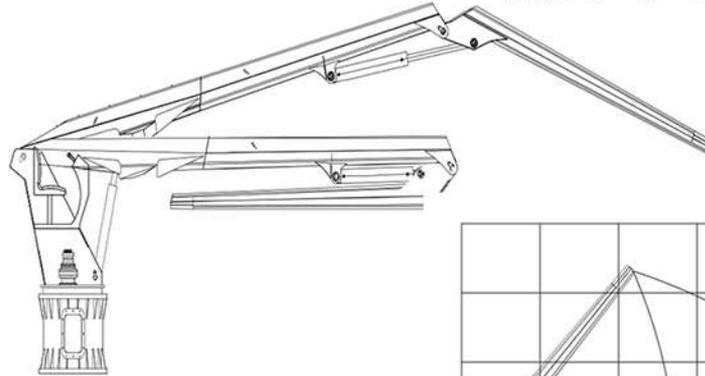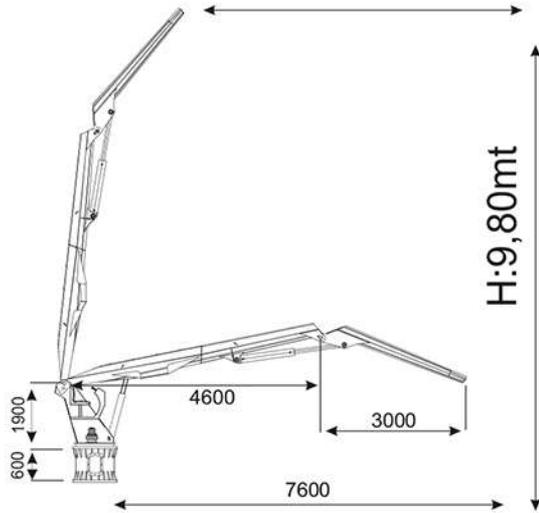

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/360°	°	bar	kg	kg	l	l/min	mm h x S
PMAATS 230	23	8	360	36		310	2630	420	160	60	2540x1000

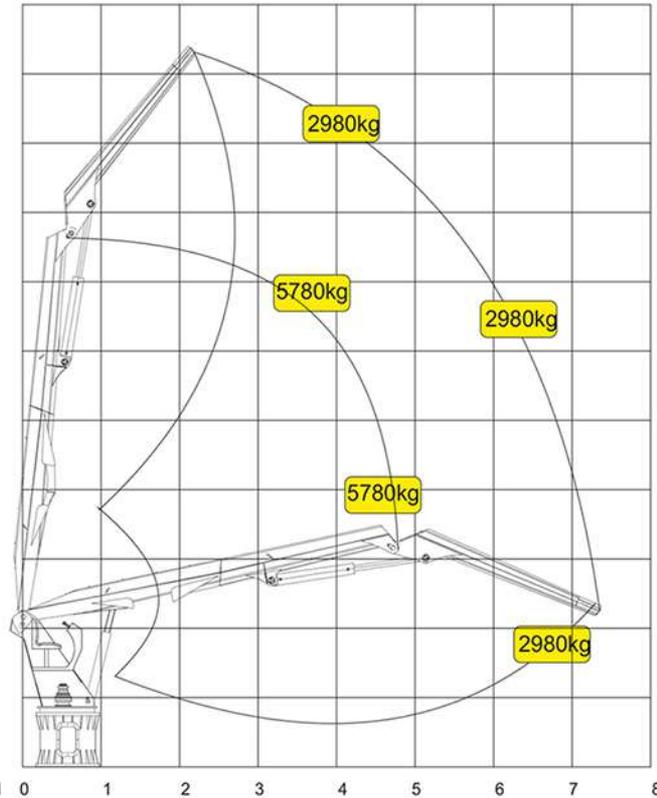

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/360°	°	bar	kg	kg	l	l/min	mm h x S
PMA EKS 150	15	8	360	30		310	1630	320	160	40	2540x1000

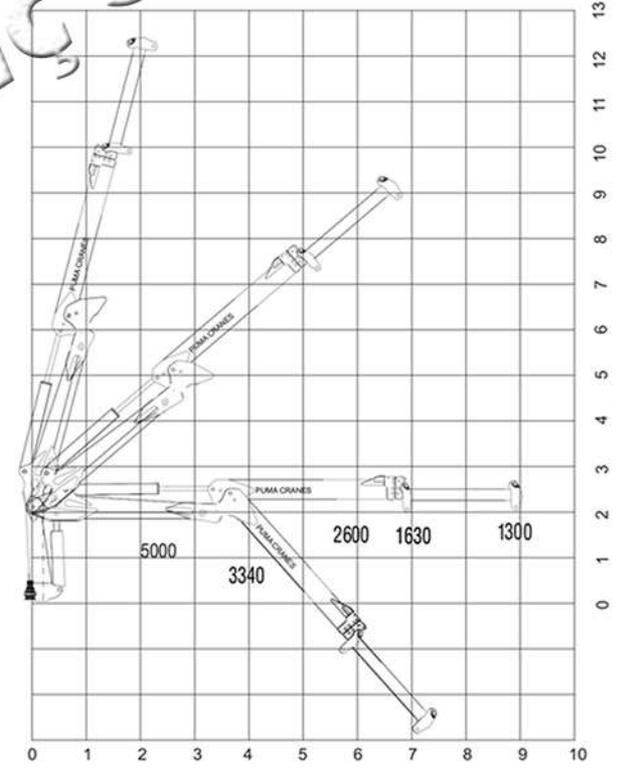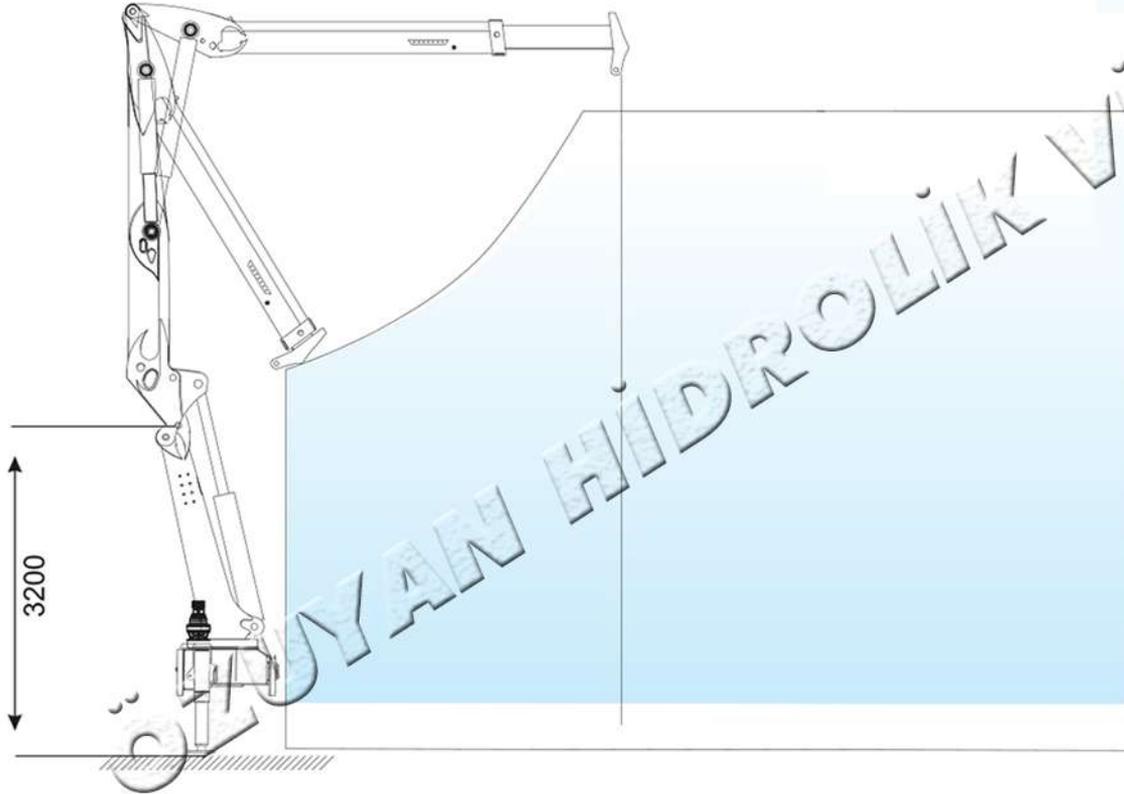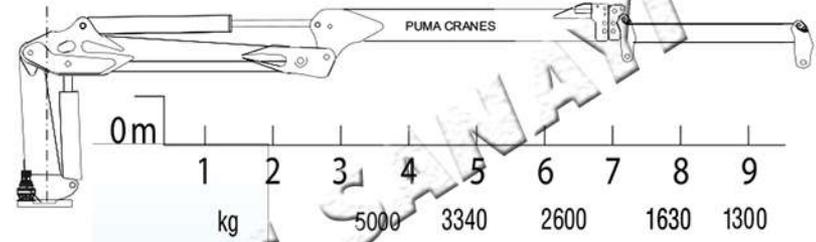

PMA 100-B2



Technical Data





Gross Lifting Moment	10T/MT
Max Hydraulic Horizontal Outreach	10mt
Slewing Angle	360
Max Rotational Torque	16.24kNm
Recommended Volume of Oil in Tank	100Lt
Max Working Oil Pressure	230bar
Recommended Pump Delivery	25L/min
Electrical Power Requirement	11kw
Weight of Standard Crane	1650kg
Mounting Base Installation	20
Quantity of Bolts Required	m20 class 10.9
Thread Pitch and Class	

Standard Features

- Built according to DIN 15018-H1-B3 standards.
- Crane structure is sandblasted and metallized.
- Double coat of primer and two layers of paint.
- Special cylinders with Ni-Cr piston rods for marine environments.
- Female fittings in stainless steel, and male fittings in carbon steel.
- Stainless steel hydraulic installation pipes.
- Hoses with rubber "type A" double coat.
- Wheel-rack slewing system, via cylinders, with bronze bushings.
- Safety valves on the cylinders.
- Hydraulic load limiter.
- Emergency stop button.

Optional Features

- Hydraulic winch
- Manual extensions
- Remote control
- Auxiliary hydraulic intakes

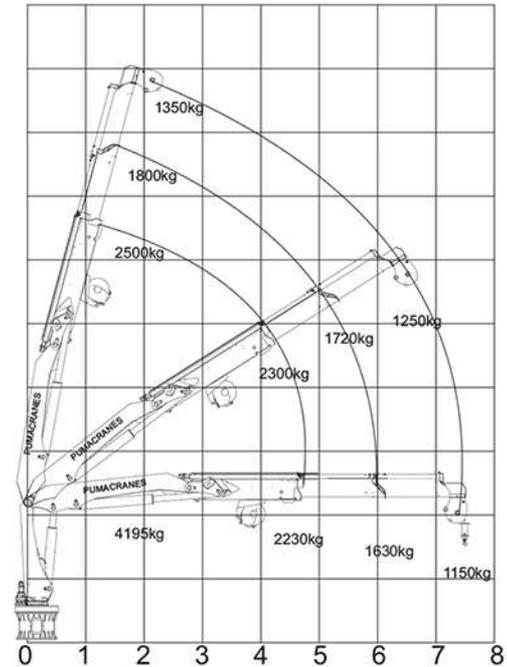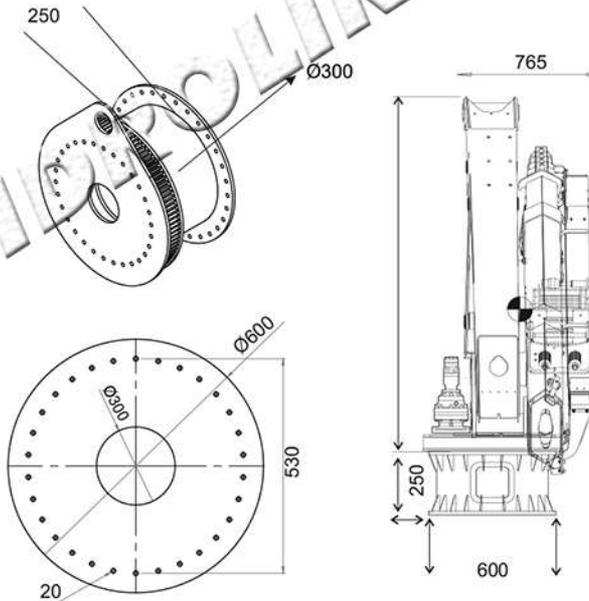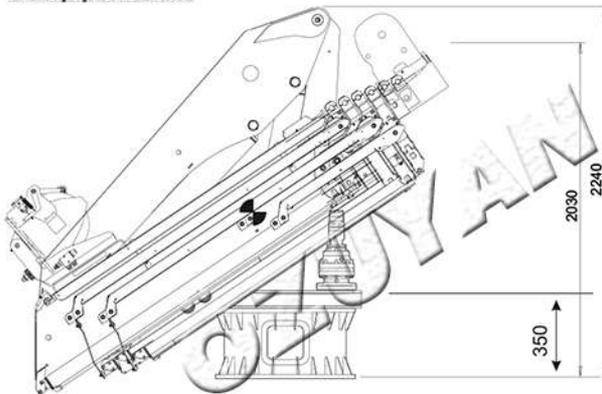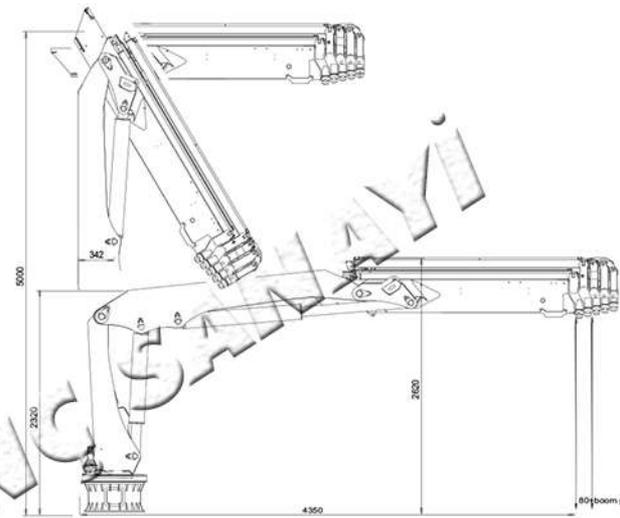

PMA 120-B2



PUMA CRANES

Technical Data





Gross Lifting Moment	12T/MT
Max Hydraulic Horizontal Outreach	11mt
Slewing Angle	360
Max Rotational Torque	18.24kNm
Recommended Volume of Oil in Tank	100Lt
Max Working Oil Pressure	230bar
Recommended Pump Delivery	25L/min
Electrical Power Requirement	11kw
Weight of Standard Crane	1780kg
Mounting Base Installation	20
Quantity of Bolts Required	m22 class 10.9
Thread Pitch and Class	

Standard Features

- Built according to DIN 15018-H1-B3 standards.
- Crane structure is sandblasted and metallized.
- Double coat of primer and two layers of paint.
- Special cylinders with Ni-Cr piston rods for marine environments.
- Female fittings in stainless steel, and male fittings in carbon steel.
- Stainless steel hydraulic installation pipes.
- Hoses with rubber "type A" double coat.
- Wheel-rack slewing system, via cylinders, with bronze bushings.
- Safety valves on the cylinders.
- Hydraulic load limiter.
- Emergency stop button.

Optional Features

- Hydraulic winch
- Manual extensions
- Remote control
- Auxiliary hydraulic intakes

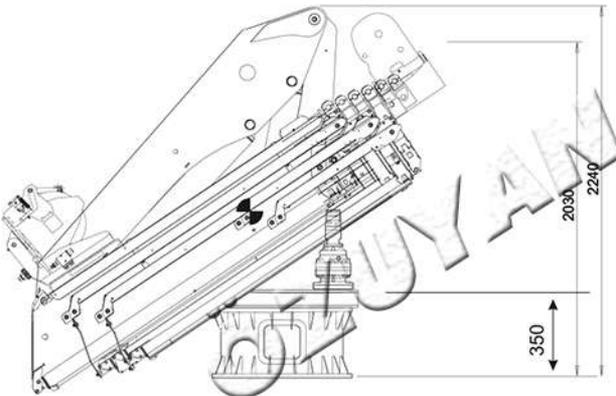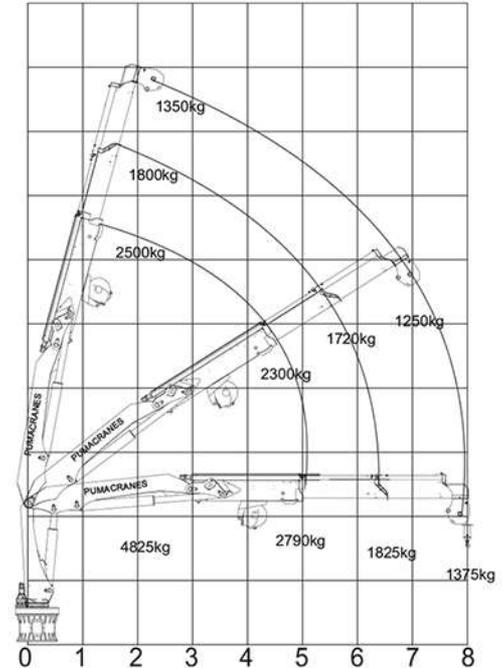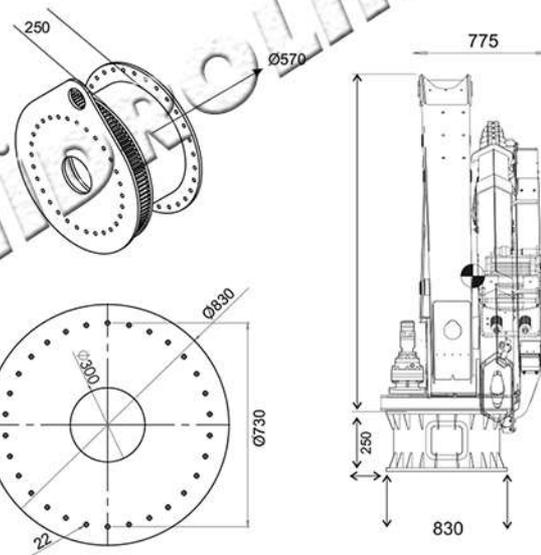
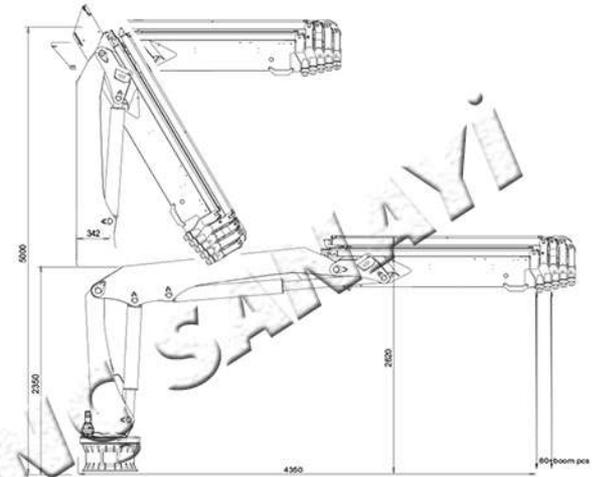


PUMA CRANES







PUMA (PMZ-70) KNUCKLE BOOM MARINE CRANE

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SWAYING ANGLE	SEWING TIME	MAX WORKING REEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS	lifting moment	Swaying torque	Grabber
	tm	m	°	/180°		bar	kg	kg	l	l/min	mm B x h x S	(kNm)	(kNm)	(MPa)
PMZ 70-B1	70t/mt	7	360°	22	2	255	1500	230	150	40	2500x3100x1200	85	22	255

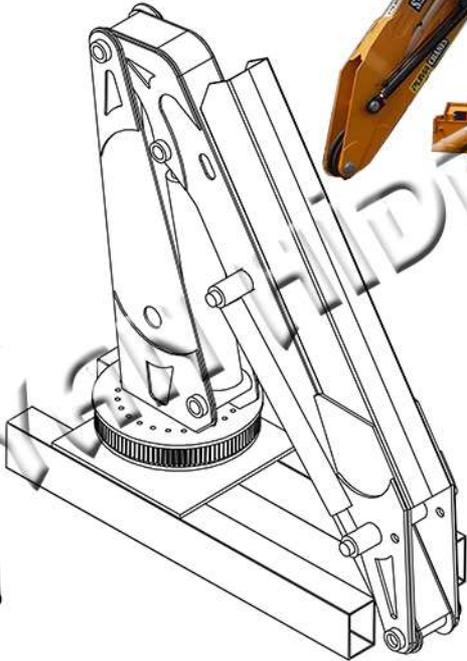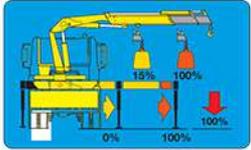

PUMA CRANE
 5549 sk no 61/143 Yedigöller Mah
 Torbalı/İZMİR
 Telephone: + (90) 0 232 481 10 63
 GSM + (90) 0 532 672 65 86
 otovinc@gmail.com
 www.pumacrane.com
 info@ozuyan.com

PUMA CRANE
 www.pumacrane.com

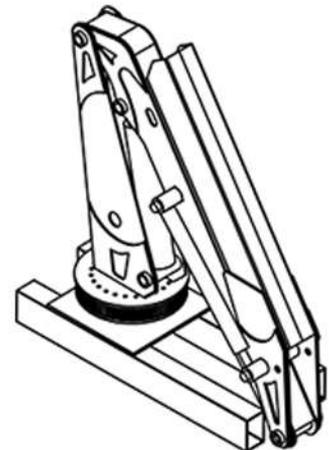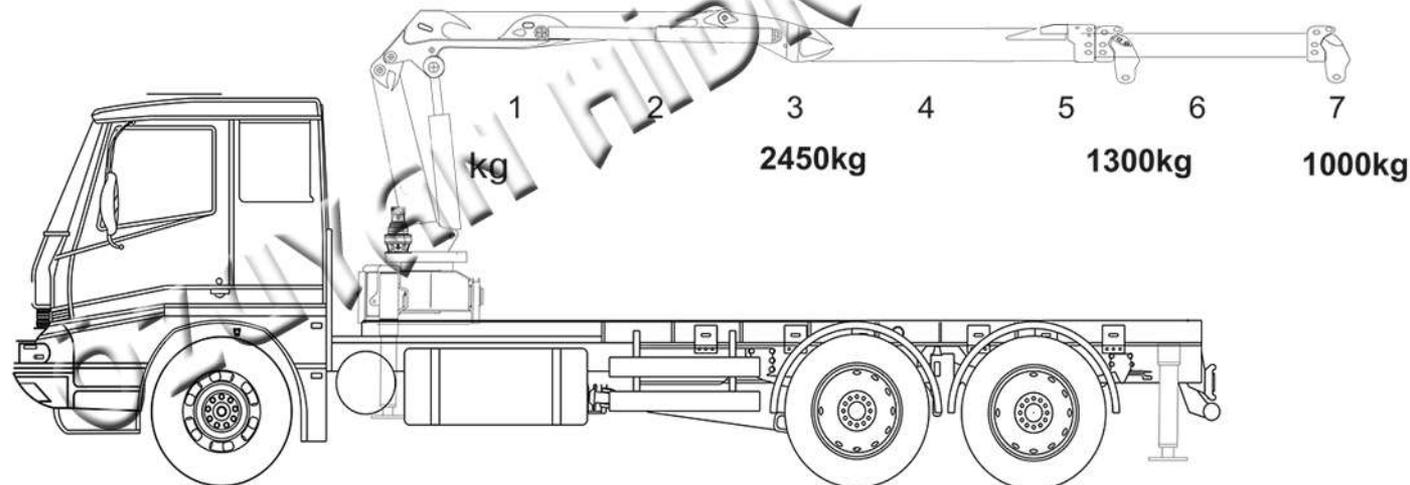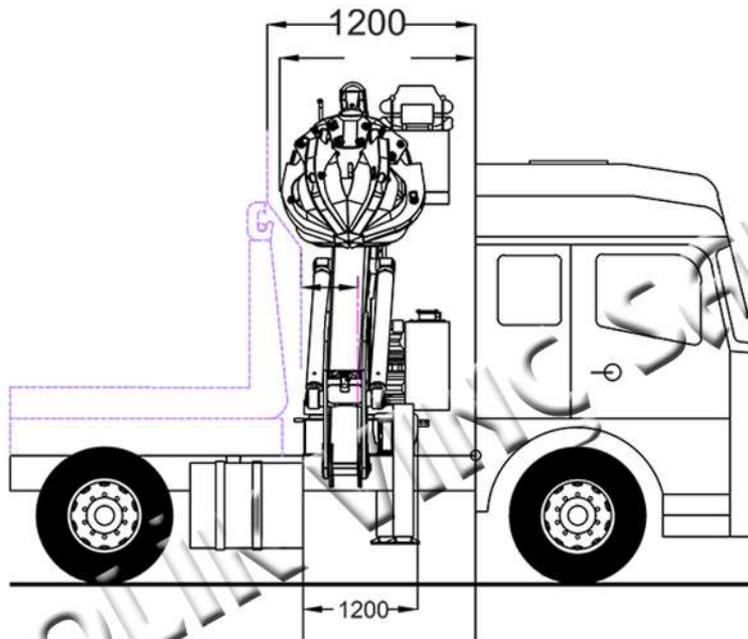
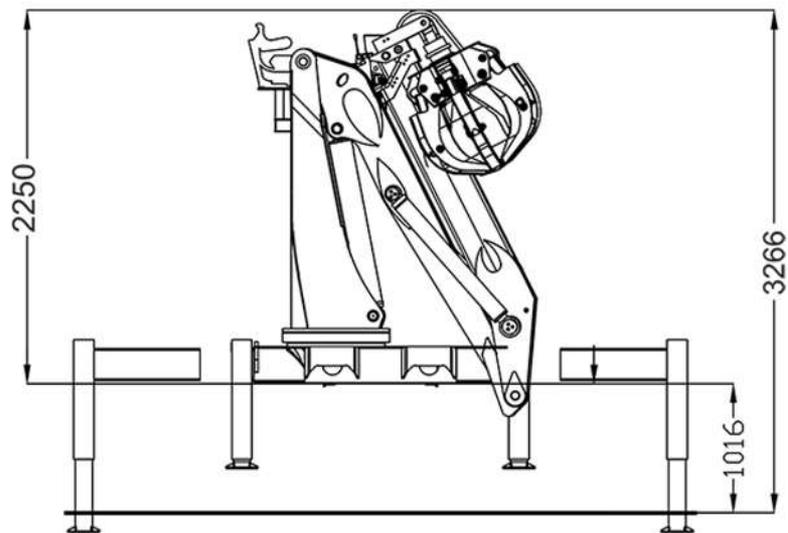


PUMA CRANES



PUMA (PMZ-120) KNUCKLE BOOM MARINE CRANE

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING REEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS	lifting moment	Slewing torque	Graber
	tm	m	°	/180°		bar	kg	kg	l	l/min	mm B x h x S	(kNm)	(kNm)	(MPa)
PMZ 120-B1 12t/mt		8,5	360°	25	4	255	2100	350	150	40	2500x3100x1200	123	30	255

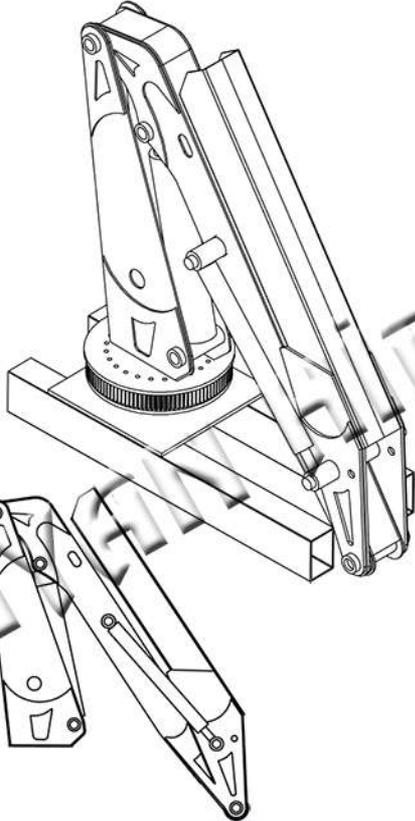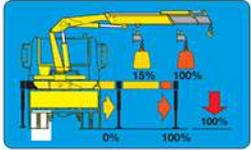

PUMA CRANE


5549 sk no 61/1/3 Yedleyöl Mah
Torbalı/IZMİR

Telephone: + (90) 0 232 481 10 63
Gsm + (90) 0 532 672 65 86

otovinc@gmail.com
www.pumacrane.com
info@ozuyan.com

PUMA CRANE

www.pumacrane.com


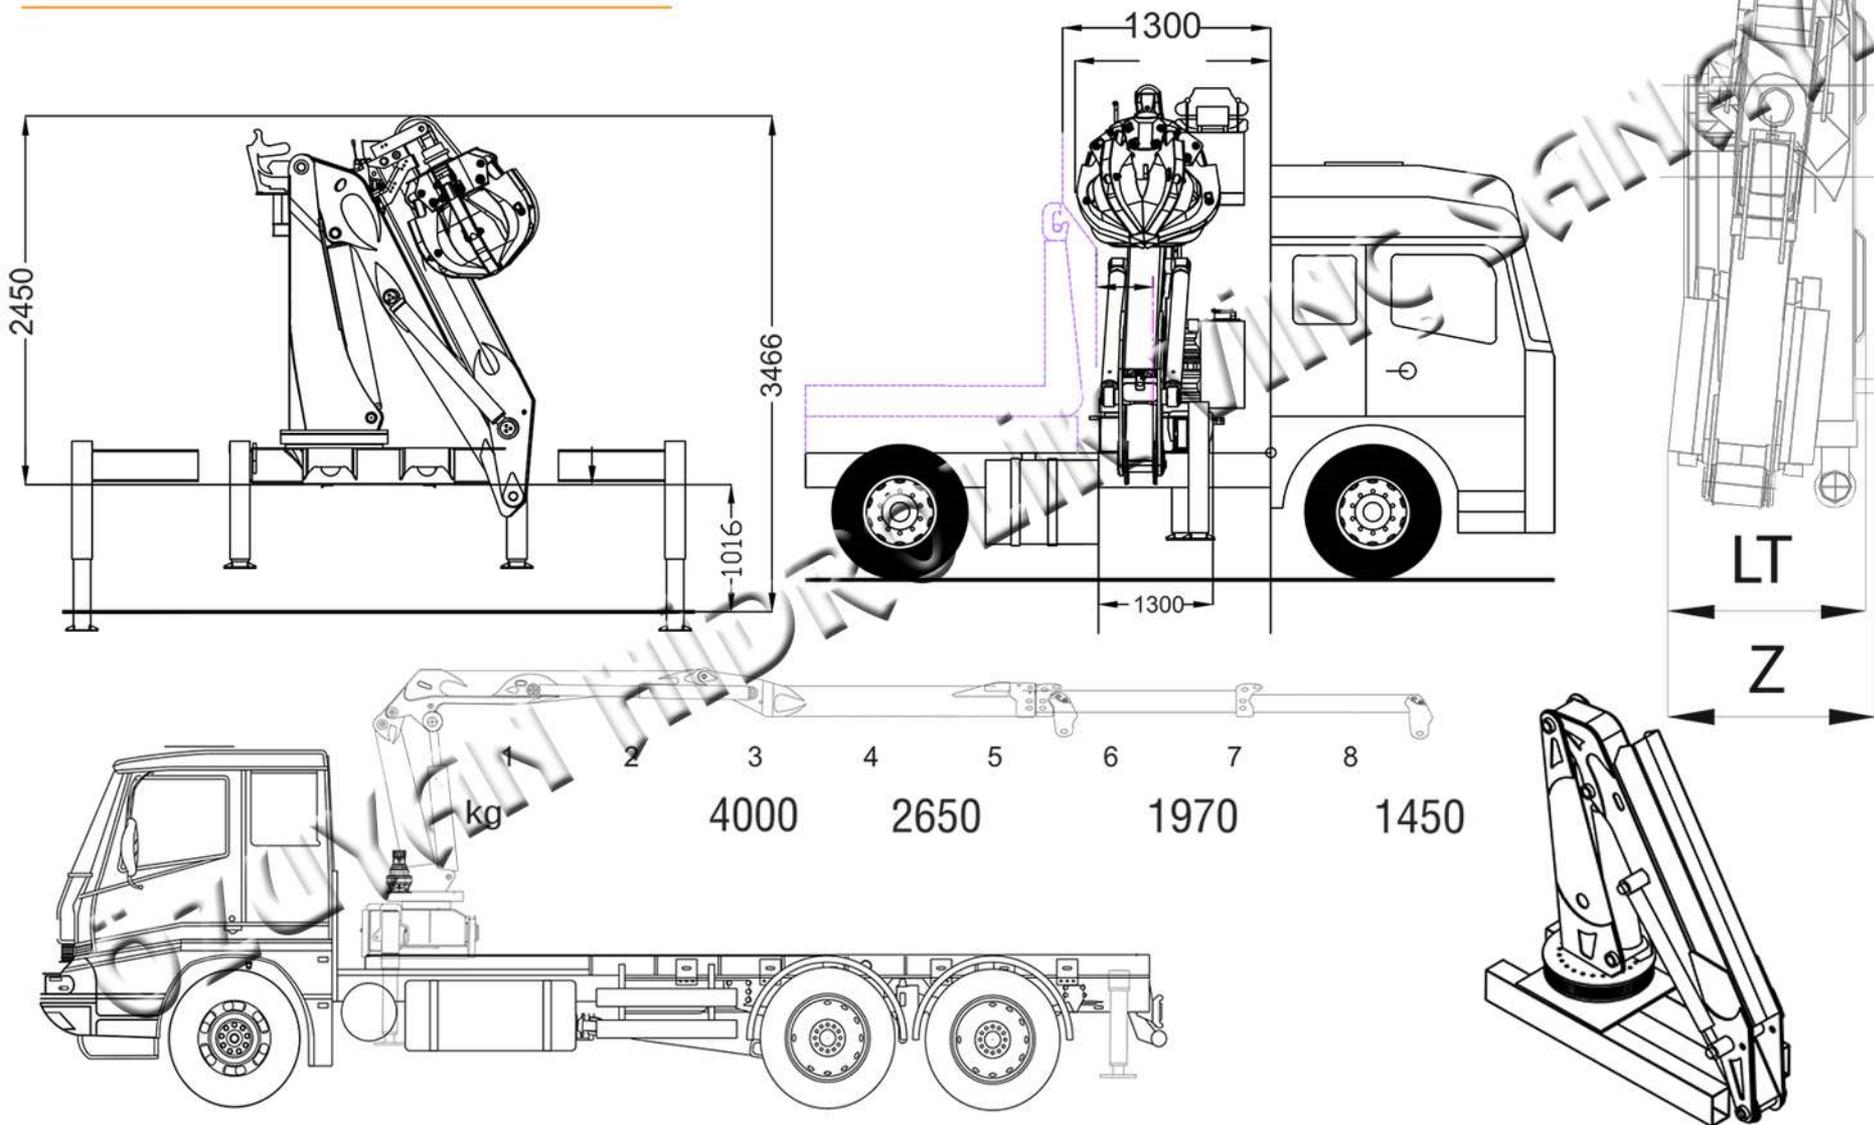


PUMA CRANES




PUMA (PMZ-150) KNUCKLE BOOM MARINE CRANE

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS	lifting moment (kNm)	Slewing torque (kNm)	Grabber (MPa)
	tm	m	°	/180°		bar	kg	kg	l	l/min	mm B x h x S			
PMZ 150-B1	15t/mt	8,5	360°	27	2	300	2400	380	150	40	2500x3100x1400	148	32	255

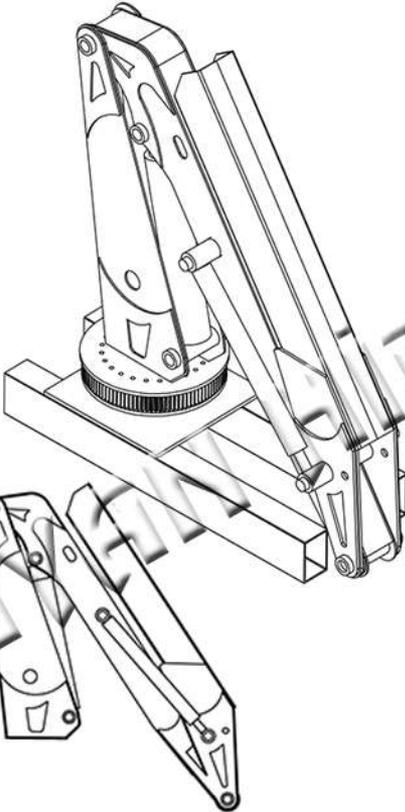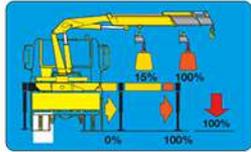

PUMA CRANE
 5549 sk no 61/1/3 Yedleyül Mah
 Torbalı/İZMİR
 Telephone: + (90) 0 232 481 10 63
 GSM + (90) 0 532 672 65 96
 otovinc@gmail.com
 www.pumacrane.com
 info@ozuyan.com

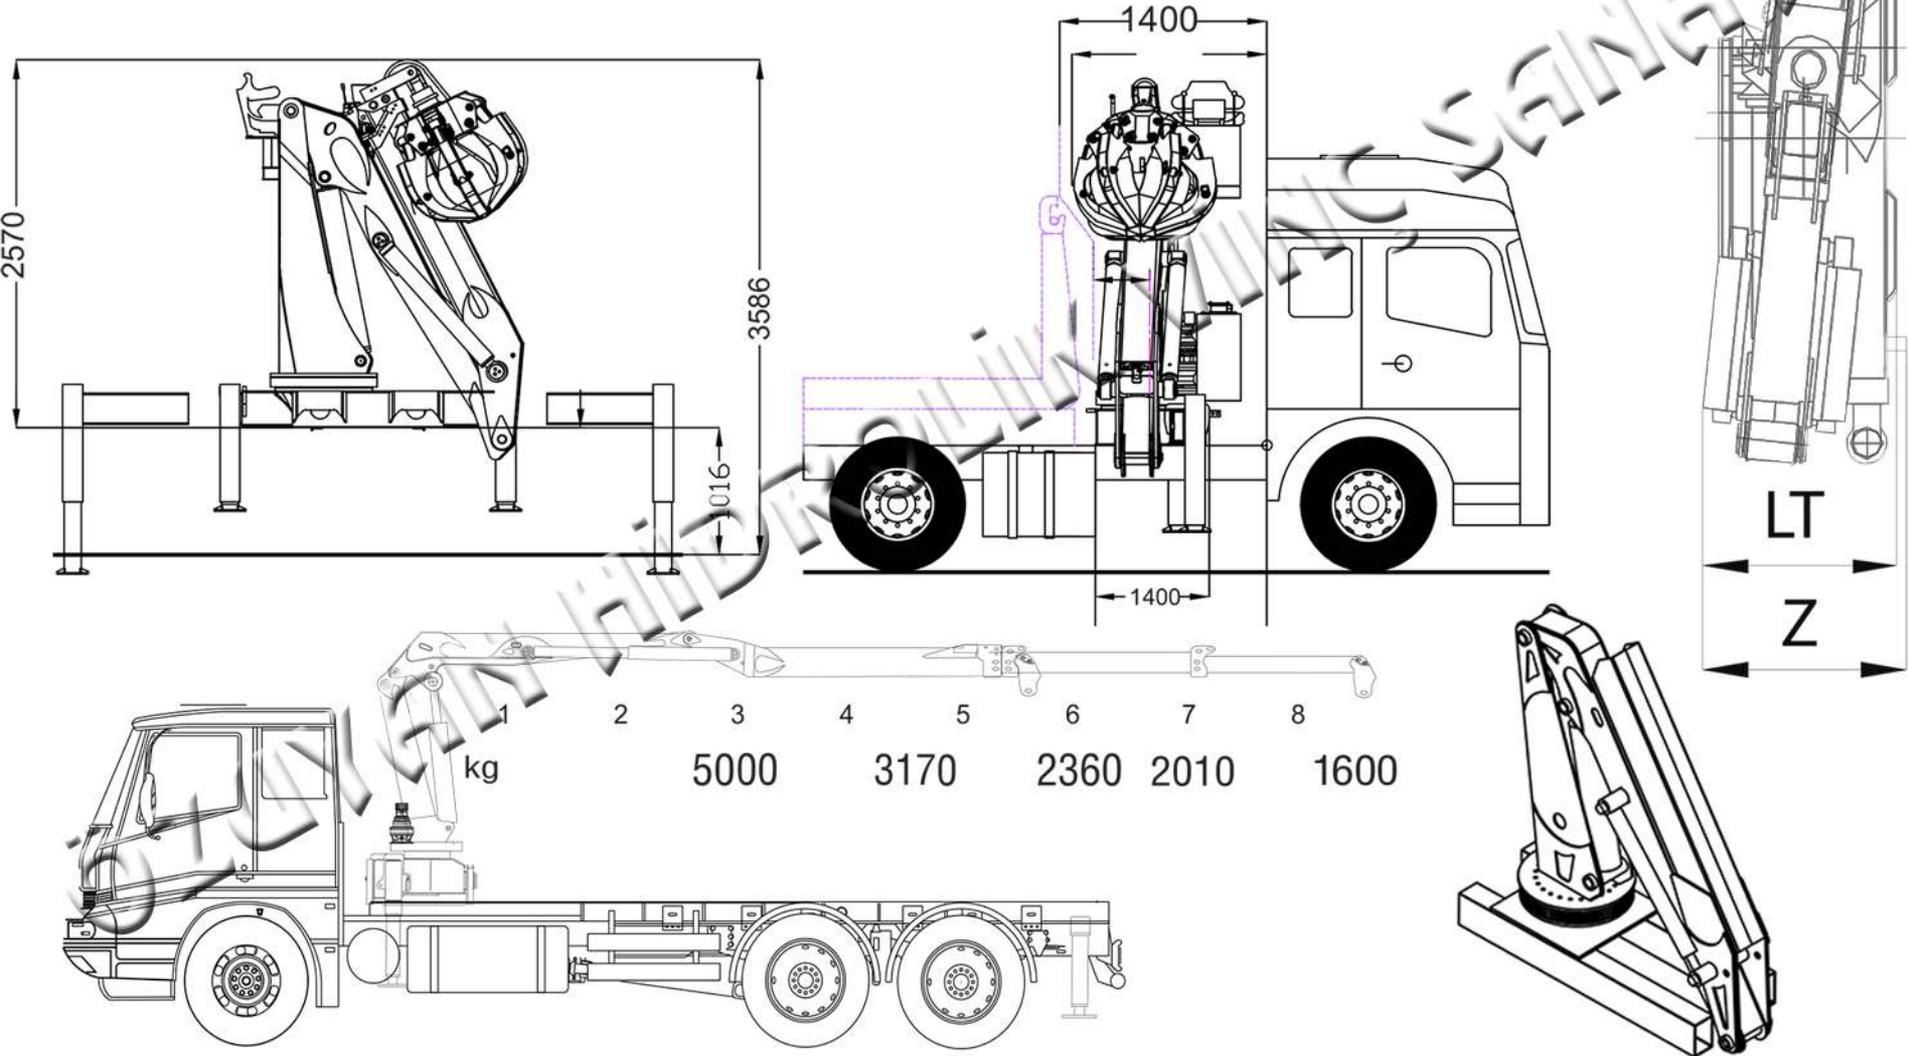

PMA 200-B4



Technical Data





Gross Lifting Moment	20T/MT
Max Hydraulic Horizontal Outreach	13mt
Slewing Angle	360°
Max Rotational Torque	21.24kNm
Recommended Volume of Oil in Tank	150Lt
Max Working Oil Pressure	230bar
Recommended Pump Delivery	35L/min
Electrical Power Requirement	17.5kw
Weight of Standard Crane	3280kg
Mounting Base Installation	
Quantity of Bolts Required	30
Thread Pitch and Class	m24 class 10.9

Standard Features

- Build according to DIN 15018-H1-B3 standards.
- Crane structure is sandblasted and metallized.
- Double coat of primer and two layers of paint.
- Special cylinders with Ni-Cr piston rods for marine environments.
- Female fittings in stainless steel, and male fittings in carbon steel.
- Stainless steel hydraulic installation pipes.
- Hoses with rubber "type A" double coat.
- Wheel-rack slewing system, via cylinders, with bronze bushings.
- Safety valves on the cylinders.
- Hydraulic load limiter.
- Emergency stop button.

Optional Features

- Hydraulic winch
- Manual extensions
- Remote control
- Auxiliary hydraulic intakes

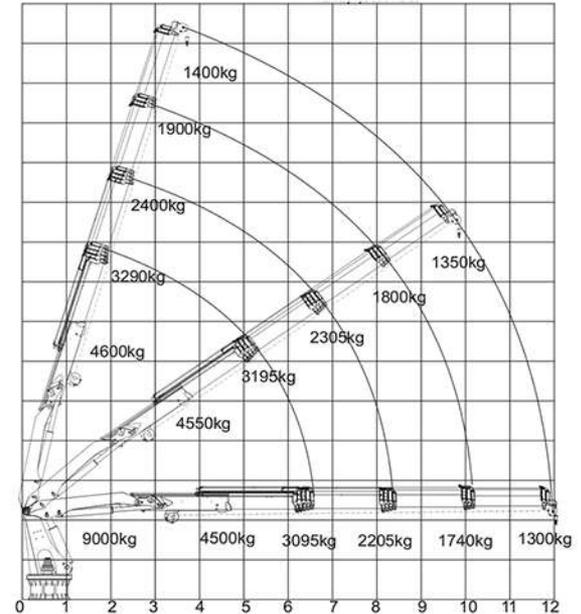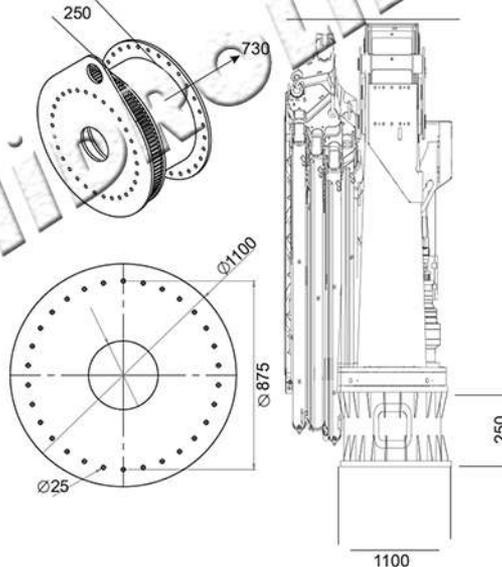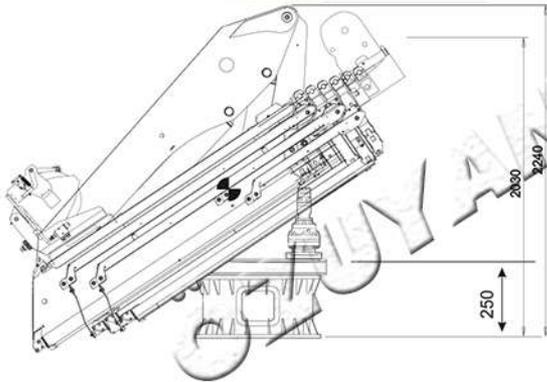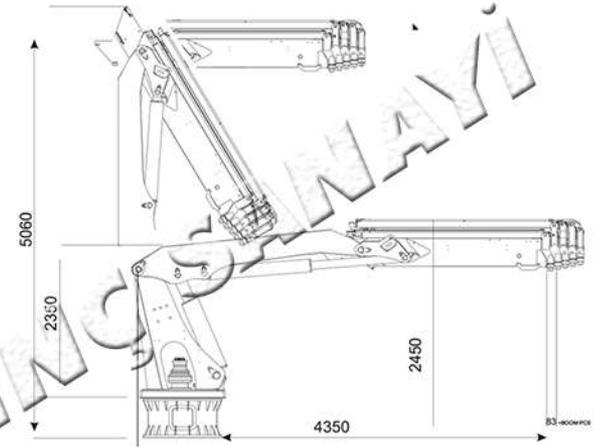

PMA 250-B4



Technical Data

Gross Lifting Moment	25T/MT
Max Hydraulic Horizontal Outreach	12mt
Slewing Angle	360
Max Rotational Torque	360
Recommended Volume of Oil in Tank	25.24kNm
Max Working Oil Pressure	170Lt
Recommended Pump Delivery	230bar
Electrical Power Requirement	40L/min
Weight of Standard Crane	21kw
	3920kg

Mounting Base Installation





Quantity of Bolts Required	25
Thread Pitch and Class	m24 class 10.9

Standard Features

- Built according to DIN 15018-H1-B3 standards.
- Crane structure is sandblasted and metalized.
- Double coat of primer and two layers of paint.
- Special cylinders with Ni-Cr piston rods for marine environments.
- Female fittings in stainless steel, and male fittings in carbon steel.
- Stainless steel hydraulic installation pipes.
- Hoses with rubber "type A" double coat.
- Wheel-rack slewing system, via cylinders, with bronze bushings.
- Safety valves on the cylinders.
- Hydraulic load limiter.
- Emergency stop button.

Optional Features

- Hydraulic winch
- Manual extensions
- Remote control
- Auxiliary hydraulic intakes

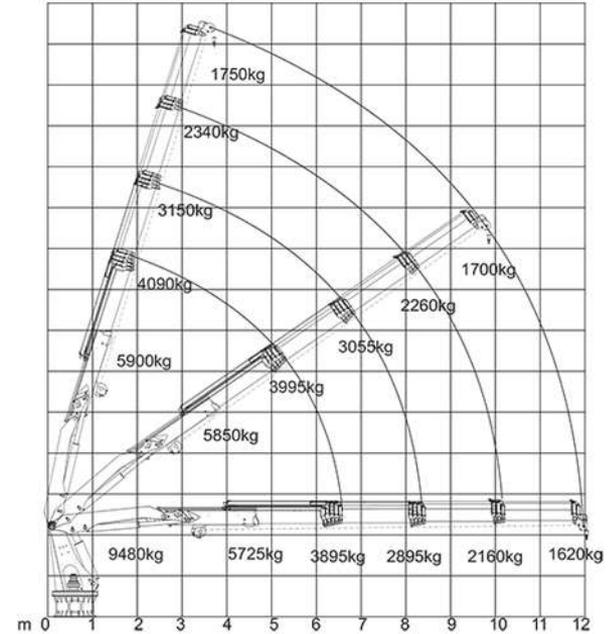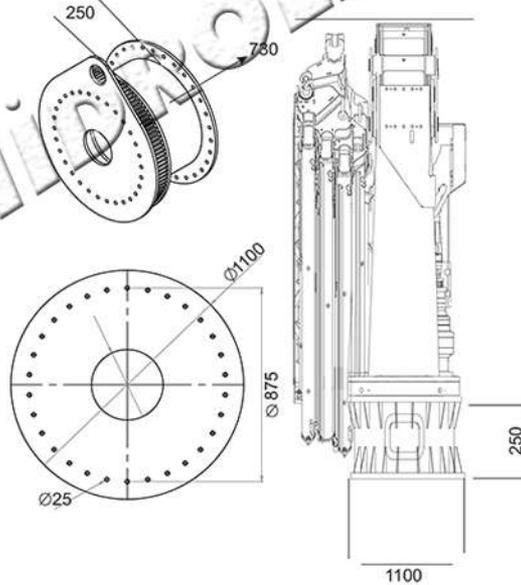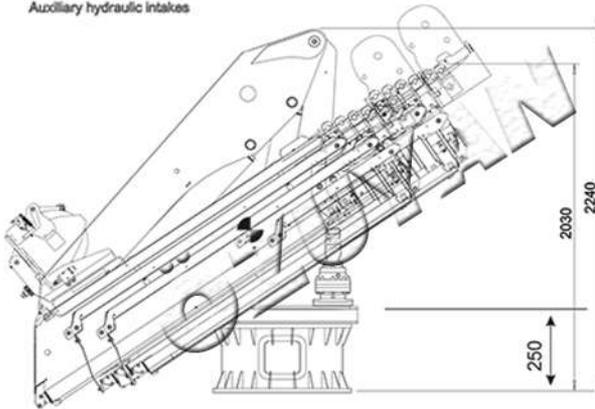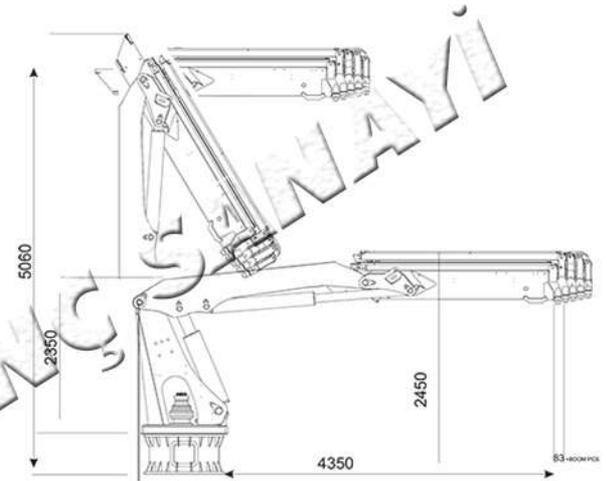

PMA 70-B2



PUMA CRANES



Technical Data

Gross Lifting Moment	7T/MT
Max Hydraulic Horizontal Outreach	10mt
Slewing Angle	360
Max Rotational Torque	12.24kNm
Recommended Volume of Oil in Tank	100Lt
Max Working Oil Pressure	230bar
Recommended Pump Delivery	15L/min
Electrical Power Requirement	7.5kw
Weight of Standard Crane	1250kg

Mounting Base Installation






Quantity of Bolts Required	18
Thread Pitch and Class	m20 class 10.9

Standard Features

- Built according to DIN 15018-H1-B3 standards.
- Crane structure is sandblasted and metallized.
- Double coat of primer and two layers of paint.
- Special cylinders with Ni-Cr piston rods for marine environments.
- Female fittings in stainless steel, and male fittings in carbon steel.
- Stainless steel hydraulic installation pipes.
- Hoses with rubber "type A" double coat.
- Wheel-rack slewing system, via cylinders, with bronze bushings.
- Safety valves on the cylinders.
- Hydraulic load limiter.
- Emergency stop button.

Optional Features

- Hydraulic winch
- Manual extensions
- Remote control
- Auxiliary hydraulic intakes

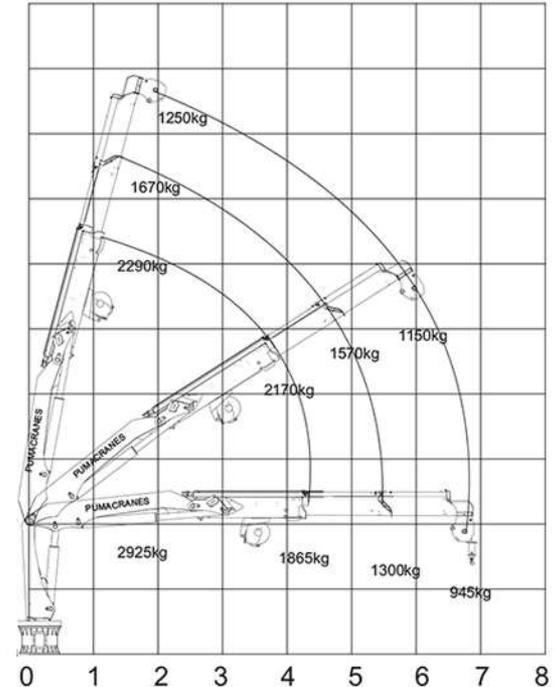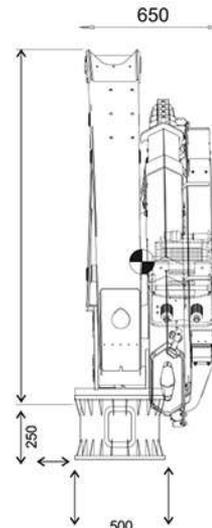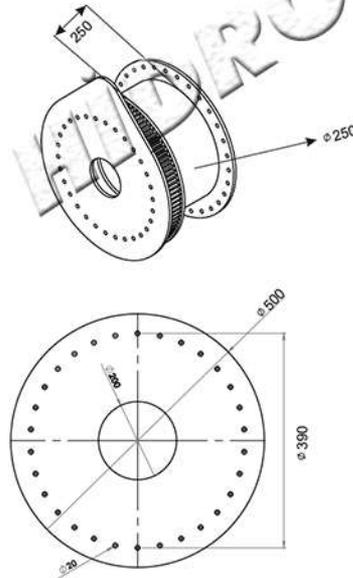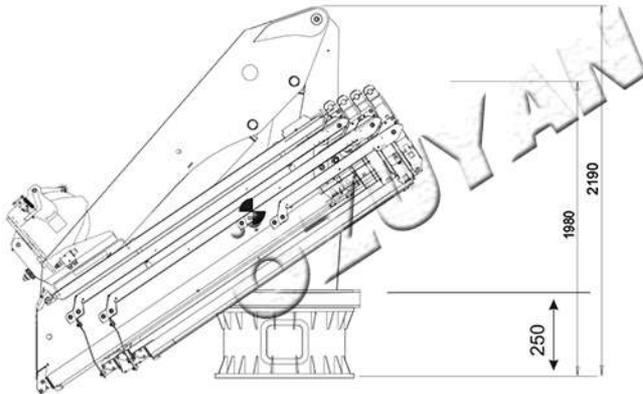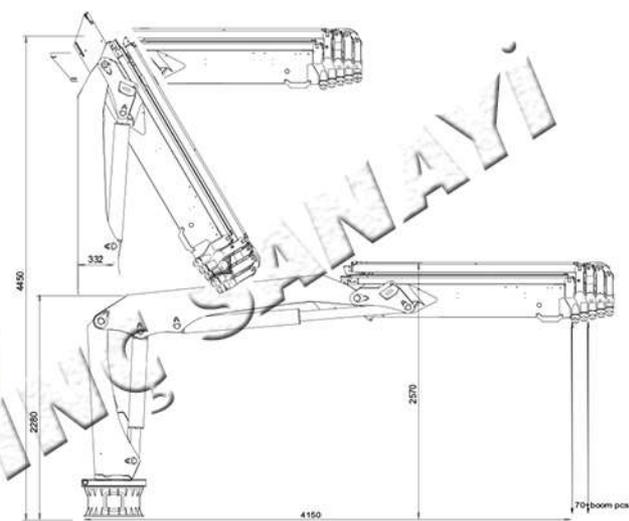

PMA 80-B2



Technical Data






Gross Lifting Moment	8T/MT
Max Hydraulic Horizontal Outreach	10mt
Slewing Angle	360
Max Rotational Torque	14.24kNm
Recommended Volume of Oil in Tank	100Lt
Max Working Oil Pressure	230bar
Recommended Pump Delivery	25L/min
Electrical Power Requirement	11kw
Weight of Standard Crane	1450kg
Mounting Base Installation	18
Quantity of Bolts Required	m20 class 10.9
Thread Pitch and Class	

Standard Features

- Built according to DIN 15018-H1-B3 standards.
- Crane structure is sandblasted and metallized.
- Double coat of primer and two layers of paint.
- Special cylinders with Ni-Cr piston rods for marine environments.
- Female fittings in stainless steel, and male fittings in carbon steel.
- Stainless steel hydraulic installation pipes.
- Hoses with rubber "type A" double coat.
- Wheel-rack slewing system, via cylinders, with bronze bushings.
- Safety valves on the cylinders.
- Hydraulic load limiter.
- Emergency stop button.

Optional Features

- Hydraulic winch
- Manual extensions
- Remote control
- Auxiliary hydraulic intakes
- Cab

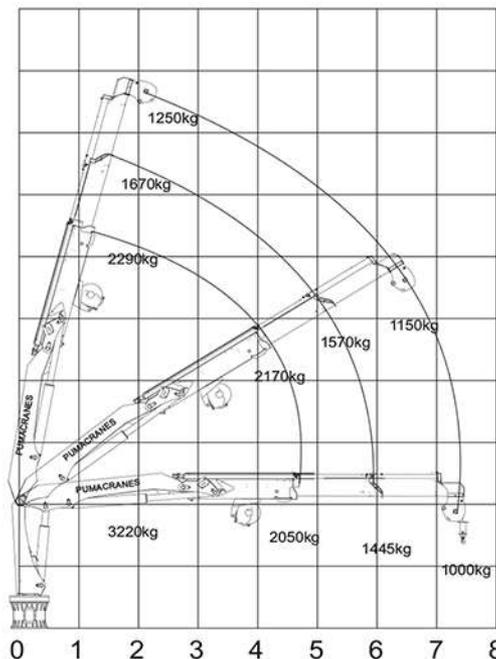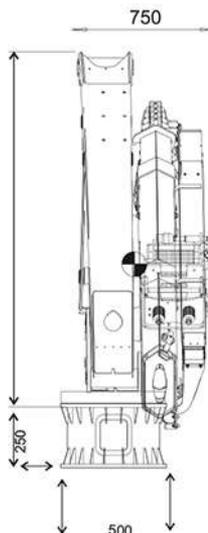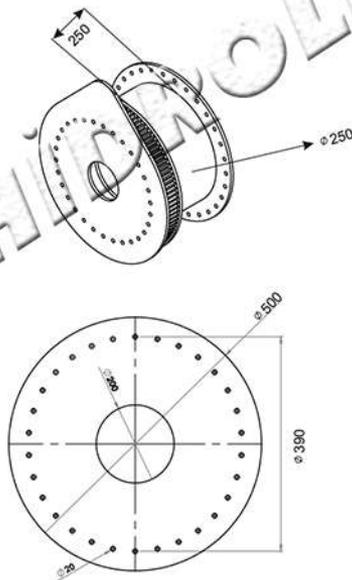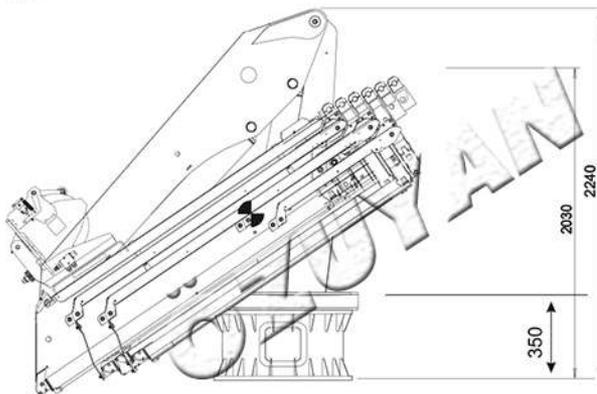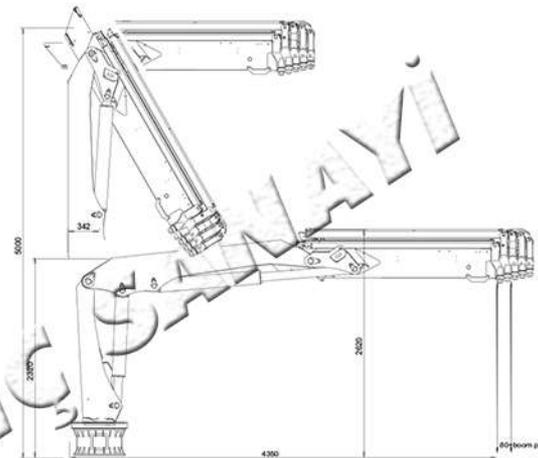

PMA 150-B4



Technical Data





Gross Lifting Moment	15T/MT
Max Hydraulic Horizontal Outreach	12mt
Slewing Angle	360°
Max Rotational Torque	19.24kNm
Recommended Volume of Oil in Tank	120Lt
Max Working Oil Pressure	230bar
Recommended Pump Delivery	27L/min
Electrical Power Requirement	15kw
Weight of Standard Crane	2180kg

Mounting Base Installation





Quantity of Bolts Required	20
Thread Pitch and Class	m22 class 10.9

Standard Features

- Built according to DIN 15018-H1-B3 standards.
 - Crane structure is sandblasted and metallized.
 - Double coat of primer and two layers of paint.
 - Special cylinders with Ni-Cr piston rods for marine environments.
 - Female fittings in stainless steel, and male fittings in carbon steel.
 - Stainless steel hydraulic installation pipes.
 - Hoses with rubber "type A" double coat.
 - Wheel-rack slewing system, via cylinders, with bronze bushings.
 - Safety valves on the cylinders.
 - Hydraulic load limiter.
 - Emergency stop button.
- ### Optional Features
- Hydraulic winch
 - Manual extensions
 - Remote control
 - Auxiliary hydraulic intakes

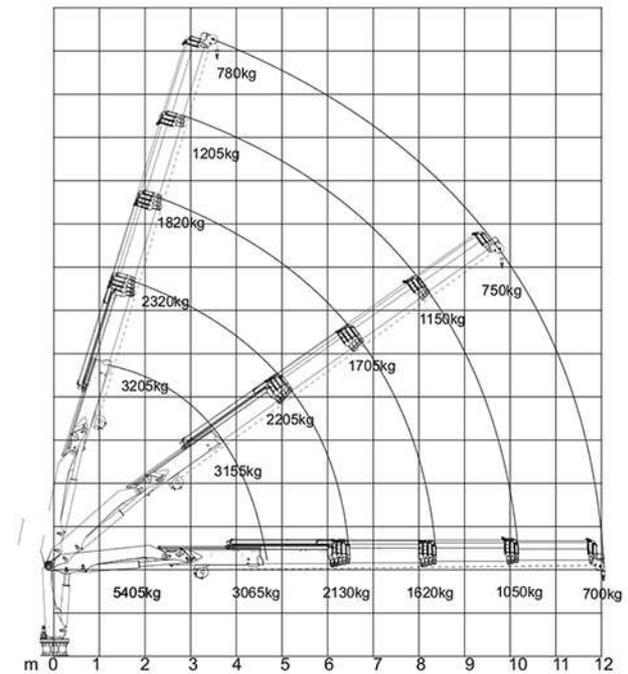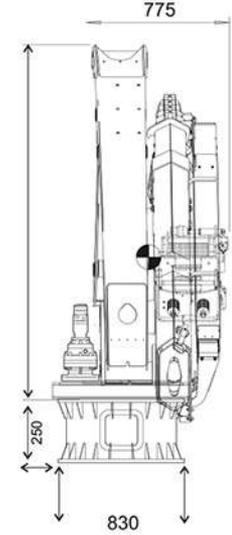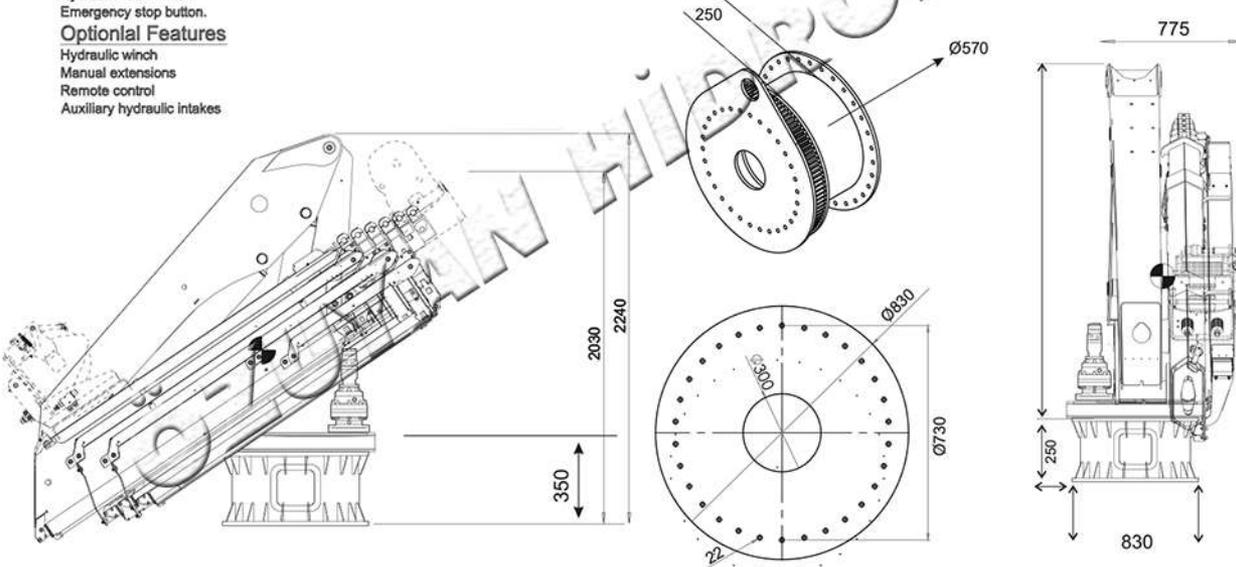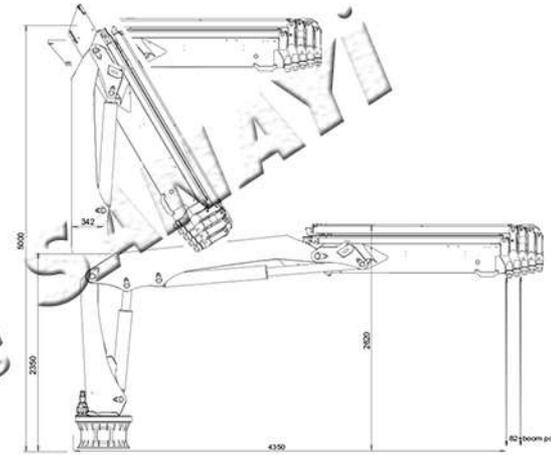

TOMRUK ATAŞMANLARI

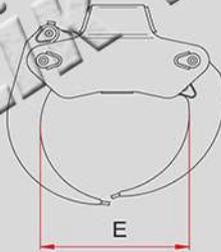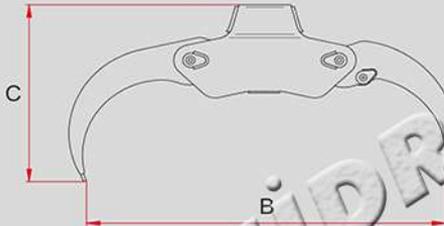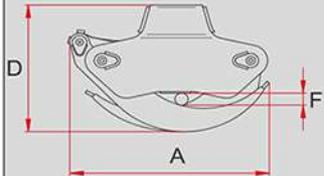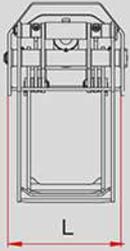

MODEL	TONAGE	WEIGHT			A	B	C	D	E	F	L
			TON	TON							
PMT 0,08	500	70	0,1-0,31	1,0-1,5	480	820	470	330	350	40	200
PMT 0,15	800	120	0,2-0,51	1,5-2,0	590	1080	570	410	450	45	250
PMT 0,20	1500	170	0,3-0,72	2,0-3,0	670	1250	660	470	510	50	350
PMT 0,30	2500	210	0,5-1,03	3,0-5,0	760	1470	700	530	580	60	450
PMT 0,40	3000	250	0,8-1,65	5,0-8,0	910	1630	880	620	690	70	550